




# 71661 - GEN 3 BULLET FLOOD

120-277V 74W 5000K

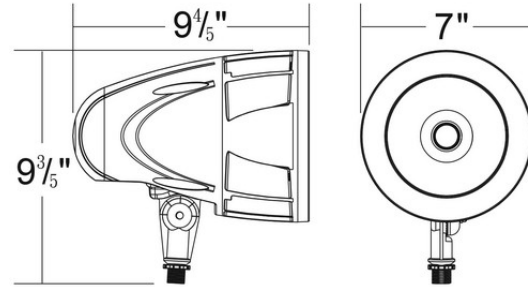


## FEATURES:

- Operation Temperature: -40°F - 104°F
- Corrosion Resistant Die Cast Aluminum Housing
- Tempered Glass Lens
- 1/2" NPT Knuckle
- 50,000+ Hour LED Life Expectancy
- IP65(Nema 4X) Dust & Water Tight
- Listings: cULus, DLC
- 5 Year Warranty



Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Input Current @ 120V	Lumens/Watt
71661	Bronze	74W	8,219	5000K	120-277	0.33A	105

## PHOTOMETRY

60°

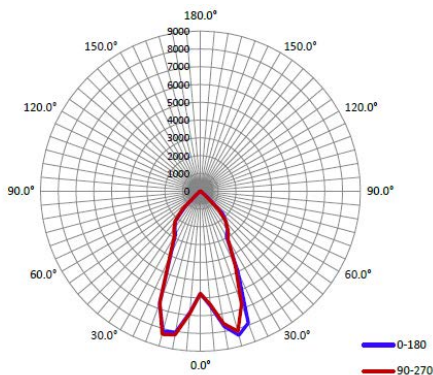

	C0/180	C45/225	C90/270	C135/315	AVG.
Beam Angle (50% I <sub>max</sub> ):	59.6	61.0	63.8	61.3	61.4
Field Angle (10% I <sub>max</sub> ):	96.9	96.7	96.5	96.8	96.7

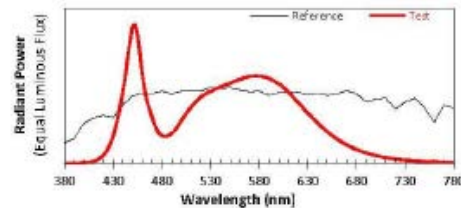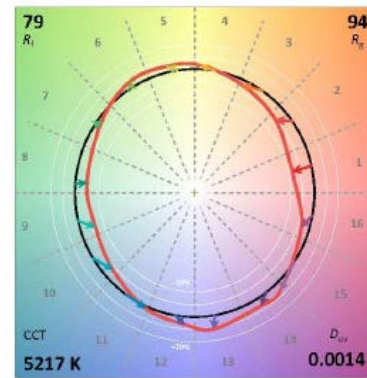



# 71661 - GEN 3 BULLET FLOOD

120-277V 74W 5000K

## Technical Specifications:

### **Electrical:**

Input Voltage: 120-277V

Current: 0.33A @120V

Frequency: 60Hz

Power Factor:  $\geq 0.99$

THD:  $\leq 20\%$

### **Product Parameters:**

Wattage: 74W

Lumens: 8,219

Efficacy: 105 Lumens Per Watt

50,000+ Hour LED Life Span

CCT: 5000K

### **Chromaticity Measurements:**

Beam Angle: 60

R9: -19

CRI: 77

### **Component Specifications:**

LED: Lumileds 2835

Driver: 120-277V 50-60HZ

**Dimming:** 0-10V

### **Operating Temperature:**

Minimum Starting -40°F - 104°F

### **Construction:**

Housing: Aluminum

Powder Coated

IP Rating: IP65

Lens Material: Tempered Glass

Mounting: 1/2" NPT Knuckle

Listings: cULus,

DLC PRODUCT ID#: PLF0YEPFTPP3

### **Warranty:**

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).