



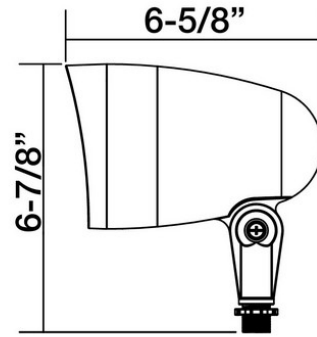

# 71677B - GEN 3 BULLET FLOOD

120-277V 21W 3000K




## FEATURES:

- Operation Temperature: -40°F - 104°F
- Corrosion Resistant Die Cast Aluminum Housing
- Tempered Glass Lens
- 1/2" NPT Knuckle
- 50,000+ Hour LED Life Expectancy
- IP65(Nema 4X) Dust & Water Tight
- Listings: cULus
- DLC PRODUCT ID#: PLCGHVFK6H5W
- 5 Year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	CRI	Lumens/Watt	Dimming
71677B	Black	21W	2,681	3000K	120-277V	≥70	128 lm/w	0-10V

## PHOTOMETRY

49° Beam Angle

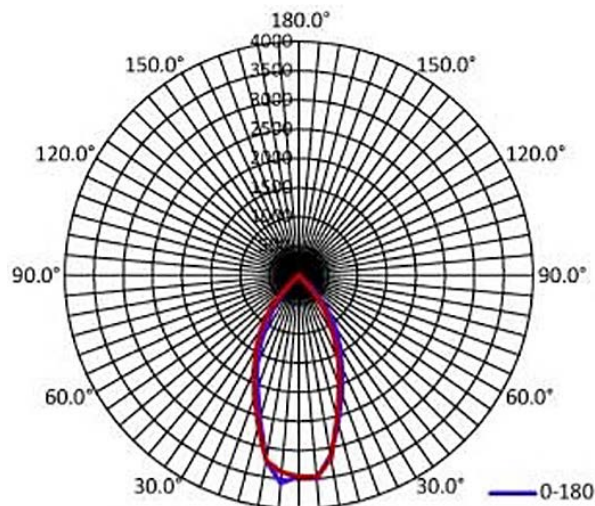



# 71677B - GEN 3 BULLET FLOOD

120-277V 21W 3000K

## Technical Specifications:

### **Electrical:**

Input Voltage: 120-277V

Current: 0.18A @120V

Frequency: 60Hz

Power Factor:  $\geq 0.99$

THD:  $\leq 20\%$

### **Product Parameters:**

Wattage: 21W

Lumens: 2,681

Efficacy: 128 Lumens Per Watt

50,000+ Hour LED Life Span

CCT: 3000K

### **Chromaticity Measurements:**

Beam Angle: 49°

R9: -29

CRI: 70

### **Component Specifications: LED:**

Lumileds 2835

Driver: 120-277V 50-60HZ

**Dimming:** 0-10V

### **Operating Temperature:**

Minimum Starting -40°F - 104°F

### **Construction:**

Housing: Aluminum

Powder Coated

IP Rating: IP65

Lens Material: Tempered Glass

Mounting: 1/2" NPT Knuckle

### **Listings:**

cULus

DLC PREMIUM PRODUCT ID#: PLCGHVFK6H5W

### **Warranty:**

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).