




71710A - GEN 5 LINEAR HIGH BAY

347-480V 165W 5000K



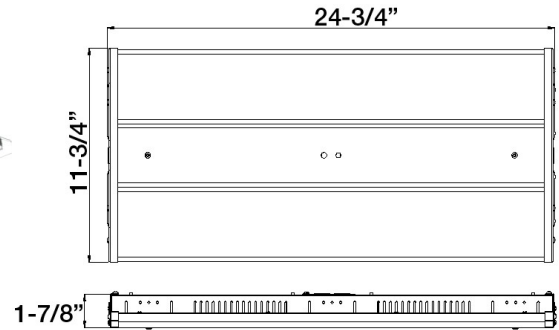


FEATURES:

- 1-10V Dimmable
- Optional External Side Mount
- Motion Sensor
- Flicker Free Driver
- Frosted PC Lens, PMMA
- Triangular Suspension Mount Hooks Included
- 50,000+ Hr Life Expectancy
- IP20 Rated
- DLC PRODUCT ID#: PTSD8IZF
- Operation Temperature -40°F - 122°F

Part#	Wattage	Voltage	Lumens	CCT	CRI	Dimming	Lumens/Watt	Replaces Fluorescent
71710A	165	347-480V	21,910	5000K	80	1-10V	135	324W

PHOTOMETRY:

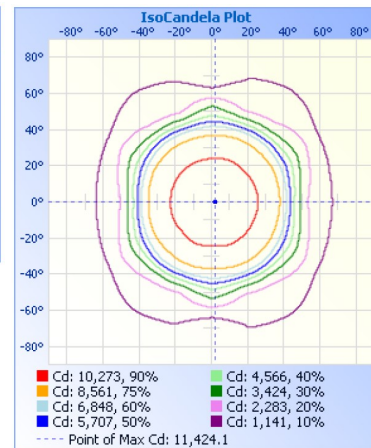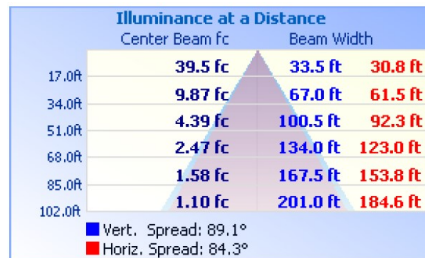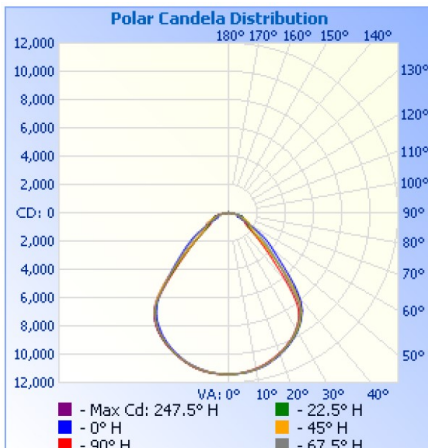



71710A - GEN 5 LINEAR HIGH BAY

347-480V 165W 5000K

Technical Specifications:

Electrical:

Input Voltage: 347 - 480V

Current: 1.4042A @ 120V

Frequency: 50/60Hz

Power Factor: ≥ 0.9

THD: 15%

Product Parameters:

165 Watts

Lumens: 21,910

Efficacy: 135 Lumens Per Watt

50,000+ L70 Life Span

CCT: 5000K (Cool White)

Chromacity Measurements:

Beam Angle: 86°

CRI: >80

R9: -7

DUV: 0.0012

Chromaticity (x,y): x=0.3797 y=0.3789

Chromaticity (u,v): u=0.2238 v=0.5024

Component Specifications:

LED: Lumileds SMD 2835

Driver: 347-480V 50/60Hz

Dimming:

1-10V

Operating Temperature:

Minimum Starting -40°F - 122°F

Construction:

Housing/Trim: Iron

PMMA Lens

IP20 Rated

Listings:

cULus

DLC PREMIUM ID#: PTSD8IZF

Accessories:

Microwave Motion Sensor	Cat# 71729B	120-277V Fixtures only
PIR Motion Sensor	Cat# 71746A	
Remote Control for Sensors	Cat# 71769A	
Emergency Backup	Cat# 71716A	
Pendant Mount for	Cat#71739A	
Suspension Cable	Cat# 71717A	
Surface Mount	Cat# 71741A	
Wire Guard	Cat# 74142A	

Carton Qty: 2

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).