




# 71713A - GEN 5 LINEAR HIGH BAY

120-277V 220W 5000K



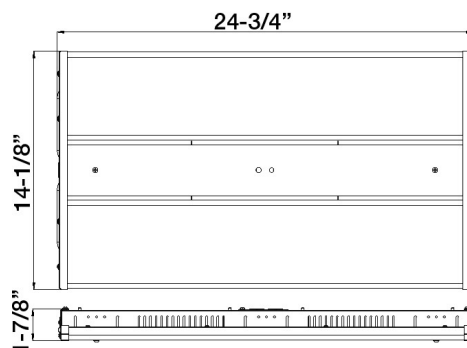


## FEATURES:

- 1-10V Dimmable
- Optional External Side Mount
- Motion Sensor
- Flicker Free Driver
- Frosted PC Lens, PMMA
- Triangular Suspension Mount Hooks Included
- 50,000+ Hr Life Expectancy
- IP20 Rated
- DLC PRODUCT ID#: PKQKU06R
- Operation Temperature -40°F - 122°F

Part#	Wattage	Voltage	Lumens	CCT	CRI	Dimming	Lumens/Watt	Replaces Fluorescent
71713A	220	120-277V	30,172	5000K	80	1-10V	137	500W

## PHOTOMETRY:

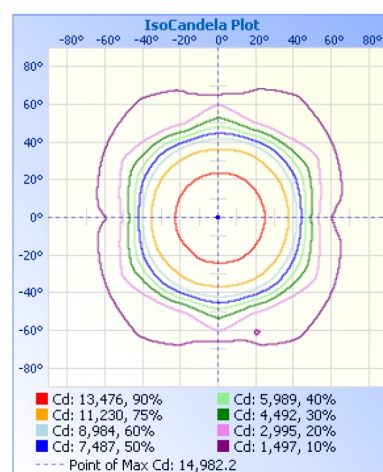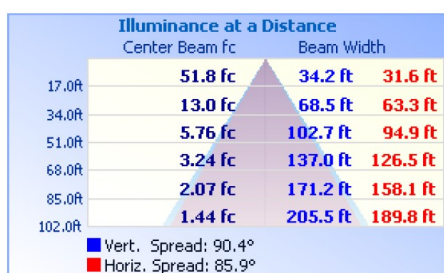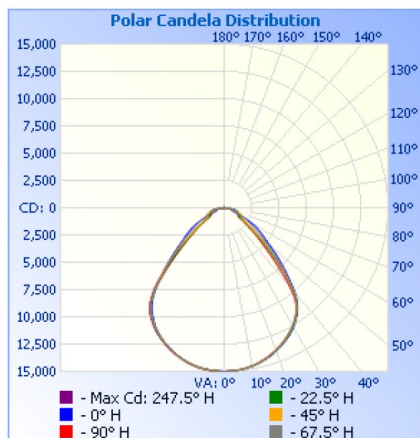



# 71713A - GEN 5 LINEAR HIGH BAY

120-277V 220W 5000K

## Technical Specifications:

### Electrical:

Input Voltage: 120 - 277

Current: 1.8227A @ 120V

Frequency: 50/60Hz

Power Factor:  $\geq 0.9$

THD: 15%

### Product Parameters:

220 Watts

Lumens: 30,172

Efficacy: 137 Lumens Per Watt

50,000+ L70 Life Span

CCT: 5000K (Cool White)

### Chromacity Measurements:

Beam Angle: 86°

CRI: >80

R9: -5

DUV: 0.0010

Chromaticity (x,y): x=0.3792 y=0.3780

Chromaticity (u,v): u=0.2238 v=0.5020

### Component Specifications:

LED: Lumileds SMD 2835

Driver: 120-277V 50/60Hz

### Dimming:

1-10V

### Operating Temperature:

Minimum Starting -40°F - 122°F

### Construction:

Housing/Trim: Iron

PMMA Lens

IP20 Rated

### Listings:

cULus

DLC PREMIUM ID#: PKQKU06R

### Accessories:

Microwave Motion Sensor Cat# 71729B

PIR Motion Sensor Cat# 71746A

Remote Control for Sensors Cat# 71769A

Pendant Mount for Cat#71739A

Cat# 71717A

Suspension Cable Cat# 71741A

Surface Mount Cat# 71741A

Wire Guard Cat# 74145A

Carton Qty: 2

### Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).