




# 71718A - GEN 5 LINEAR HIGH BAY

120-277V 300W 5000K



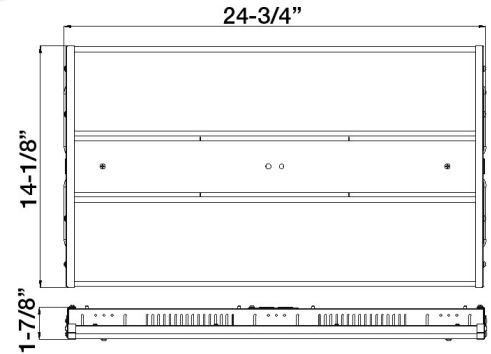


## FEATURES:

- 1-10V Dimmable
- Optional External Side Mount
- Motion Sensor
- Flicker Free Driver
- Frosted PC Lens, PMMA
- Triangular Suspension Mount Hooks Included
- 50,000+ Hr Life Expectancy
- IP20 Rated
- DLC PRODUCT ID#: PBVH7RK4
- Operation Temperature -40°F - 122°F

Part#	Wattage	Voltage	Lumens	CCT	CRI	Dimming	Lumens/Watt	Replaces Fluorescent
71718A	300	120-277V	42,321	5000K	80	1-10V	140	500W

## PHOTOMETRY:

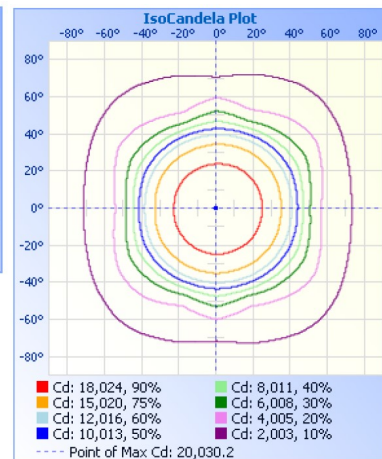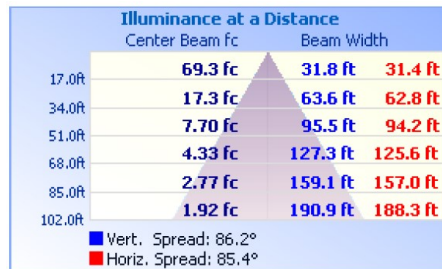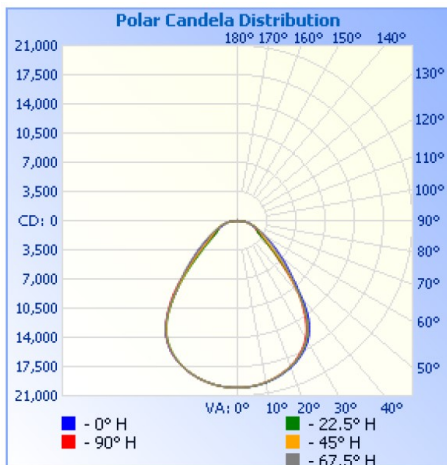



# 71718A - GEN 5 LINEAR HIGH BAY

120-277V 300W 5000K

## Technical Specifications:

### Electrical:

Input Voltage: 120 - 277

Current: 2.5387A @ 120V

Frequency: 50/60Hz

Power Factor:  $\geq 0.9$

THD: 15%

### Product Parameters:

300 Watts

Lumens: 42,321

Efficacy: 140 Lumens Per Watt

50,000+ L70 Life Span

CCT: 5000K (Cool White)

### Chromacity Measurements:

Beam Angle: 86°

CRI: >80

R9: -3

DUV: 0.0005

Chromaticity (x,y): x=0.3781 y=0.3763

Chromaticity (u,v): u=0.2237 v=0.5011

### Component Specifications:

LED: Lumileds SMD 2835

Driver: 120-277V 50/60Hz

### Dimming:

1-10V

**Operating Temperature:** Minimum Starting -40°F - 122°F

### Construction:

Housing/Trim: Iron

PMMA Lens

IP20 Rated

### Listings:

cULus

DLC PREMIUM PRODUCT ID#: PBVH7RK4

### Accessories:

Microwave Motion Sensor Cat# 71729B

PIR Motion Sensor Cat# 71746A

Remote Control for Sensors Cat# 71769A

Pendant Mount Cat#71739A

Suspension Cable Cat# 71717A

Surface Mount Cat# 71741A

Wire Guard Cat# 74145A

Carton Qty: 2

### Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).