




# 2 X 2 LED EdgeLit Panel Cat#71762A

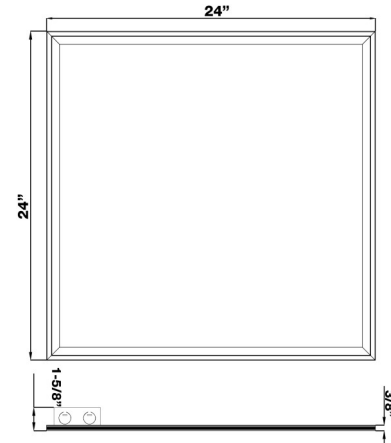

## Features:

Ideal for New Construction or Troffer Replacement in Offices, Hallways, Conference Rooms etc.

Edgelit

PMMA Light Guide Panel

Flicker Free Driver

Aluminum/Zinc Alloy Backplate & Aluminum Frame


Operating Temperature: -22°F - 104°F

IP20 Dry Location Rated

5 Year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Beam Angle	Lumens/Watt	DLC #
71762A	White	40	4479	5000	120-277	0-10V	120°	112	PLMO8Q9E1ZQH

## PHOTOMETRY

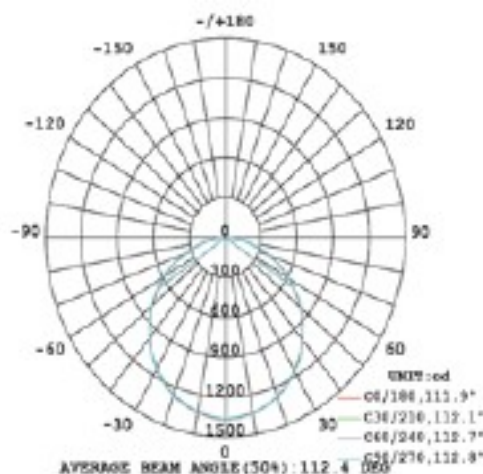



# 2 X 2 LED EdgeLit Panel Cat#71762A

## Technical Specifications:

### **Electrical:**

Input Voltage: 120 thru 277

Current: .084A @ 120V

Frequency: 50/60Hz

Power Factor:  $\geq 0.9$

THD: 12.5%

### **Product Parameters:**

40 Watts

Lumens: 4479

Efficacy: 112.6 lumens per watt

50,000+ L70 Life Span

CCT: 5000K (Cool White)

### **Chromaticity Measurements:**

Beam Angle: 120°

CRI: >83

R9:

DUV: .

Chromaticity (x,y):

Chromaticity (u,v):

### **Component Specifications:**

LED: SMD2835

Driver: 50/60Hz

Driver Output Volts: DC25-42V

Driver Output Amps: 1000mA

### **Dimming:**

0-10V / PWM / VR

### **Operating Temperature:**

Minimum Starting -22°F - 104°F

### **Construction:**

Housing: Aluminum/Zinc Alloy Backplate & Aluminum Frame

IP Rating: IP20 Dry Location Rated

Lens Material: PMMA

Mounting: Ceiling Mount

Listings:

UL Listed: E492428

DLC #: PLM08Q9E1ZQH

Carton Qty: 4

Weight: 16 lb per carton; 4 lb per fixture

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).