



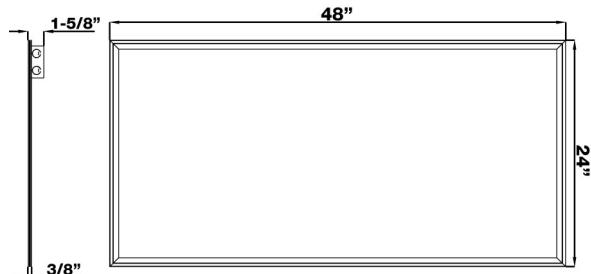

2 X 4 LED EdgeLit Panel Cat#71772A

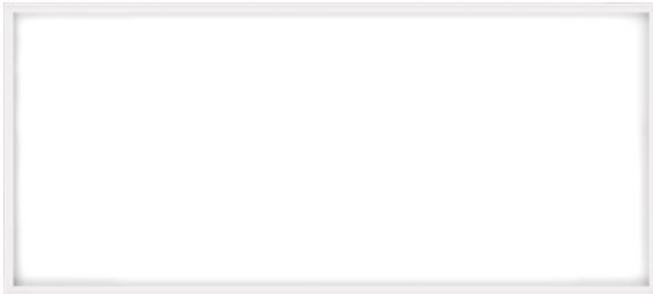

Features:

Ideal for New Construction or Troffer Replacement in Offices, Hallways, Conference Rooms etc.

Aluminum/Zinc Alloy Backplate & Aluminum Frame

Edgelit

Operating Temperature: -22°F - 104°F

PMMA Light Guide Panel


IP20 Dry Location Rated

Flicker Free Driver

5 Year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Light Pattern	Lumens/Watt	DLC #
71772A	White	50	5061	5000	120-277	0-10V	120°	105.7	PL9AS13GI3H1

PHOTOMETRY

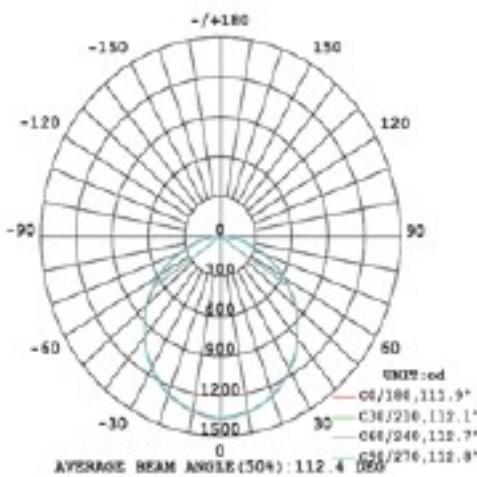



2 X 4 LED EdgeLit Panel Cat#71772A

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277
Current: .084A @ 120V
Frequency: 50/60Hz
Power Factor: ≥.0.9
THD: 13.1%

Operating Temperature:

Minimum Starting -22°F - 104°F

Construction:

Housing: Aluminum/Zinc Alloy Backplate & Aluminum Frame
IP Rating: IP20 Dry Location Rated

Product Parameters:

50 Watts
Lumens: 5061
Efficacy: 105.7 Lumens Per Watt
50,000+ L70 Life Span
CCT: 5000K (Cool White)

Lens Material: PMMA

Mounting: Ceiling Mount

Listings:

UL Listed: E492428
DLC #: PL9AS13GI3H1

Chromacity Measurements:

Beam Angle: 120°
CRI: >82
R9:
DUV: .
Chromaticity (x,y):
Chromaticity (u,v):

Carton Qty: 4

Weight: 14.9lb per carton; 3.72 lb per fixture

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

Component Specifications:

LED: SMD2835
Driver: 50/60Hz
Driver Output Volts: 25-42
Driver Output Amps: 1050mA

Dimming:

0-10V / PMW / VR