




72311 - LED BOLLARD ROUND DOME TOP ONLY BRONZE

120-277V 3K/4K/5K 12W/16W/22W

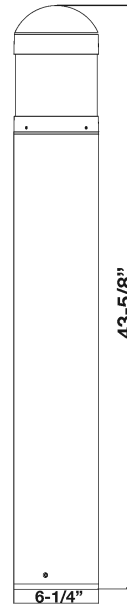


FEATURES

- Round Dome Top Only. Base sold separately Cat# 72310
- Color Tunable: 3000K, 4000K or 5000K
- Wattage Tunable: 12W, 16W or 22W
- Samsung 2835 LEDs
- 120-277V
- Housing Color: Bronze
- Corrosion Resistant Die-Cast Aluminum Housing
- Operating Temperature: -40°F to 122°F
- IP65 Rated
- cULus Listed
- DLC PRODUCT ID#: S-7JZQ2A

Part#	CCT	Lumens	Voltage	Beam Angle	Wattage	Lumens/Watt
72311	5000K	3,121	120-277V	60°	12/16/22W	142lm/w @22W
	4000K	2,923				133lm/w @22W
	3000K	2,841				129lm/w @22W

PHOTOMETRY

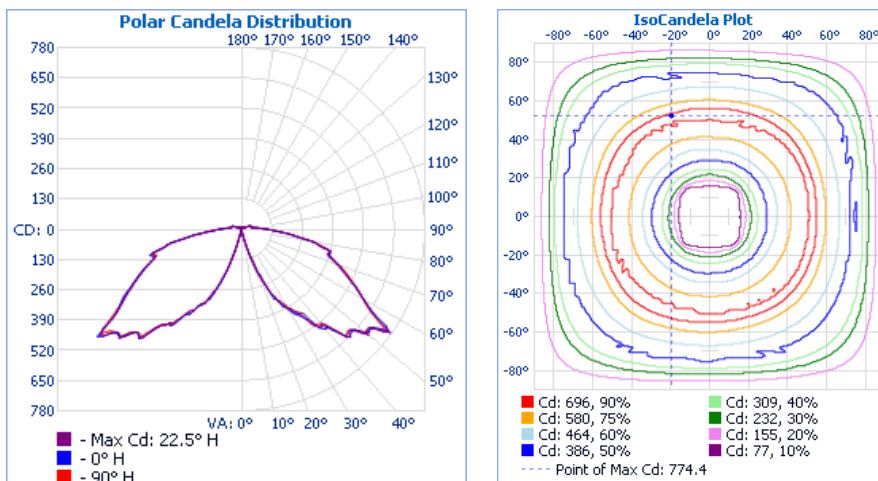



72311 - LED BOLLARD ROUND DOME TOP ONLY BRONZE

120-277V 3K/4K/5K 12W/16W/22W

Technical Specifications:

Electrical:

Input Voltage: 120V-277V

Current: .15A@120V

Frequency: 50/60Hz

Power Factor: ≥.98

THD: >20%

Operating Temperature:

Minimum Starting: -40°F~122°F

Construction:

Housing: Corrosion Resistant Aluminum

Alloy Powder Coated

IP Rating: IP65 suitable for wet locations

Product Parameters:

Input Watts: 12W/16W/22W

Lumens: 2,923@4000K

Efficacy: 133 lumens per watt

30,000+ Hour L70 Life Span

CCT: 3K/4K/5K

Lens Material: Polycarbonate

Mounting: Outdoor

Listings:

cULus

DLC PRODUCT ID#: S-7JZQ2A

Chromacity Measurements:

Beam Angle: 60°

CRI: >80

R9: 14

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

Component Specifications:

LED: SMD 2835

120-277V, 50-60Hz

Dimming: N/A

Accessories:

CAT. NO.	FIG.	DESCRIPTION	COLOR TEMP	WATTS	VOLTS	LUMENS @ 4,000K*	HOUSING COLOR
72310	-	ROUND - BASE ONLY	-	-	120-277V	-	BRONZE
72311	2	ROUND DOME - TOP ONLY	3K, 4K, 5K	12W, 16W, 22W	120-277V	2,923*	BRONZE
72312	3	ROUND LOUVERED DOME - TOP ONLY	3K, 4K, 5K	12W, 16W, 22W	120-277V	2,923*	BRONZE
72313	4	ROUND FLAT - TOP ONLY	3K, 4K, 5K	12W, 16W, 22W	120-277V	2,923*	BRONZE