




72537 - SOLAR FLOOD LIGHT

60W 4000K

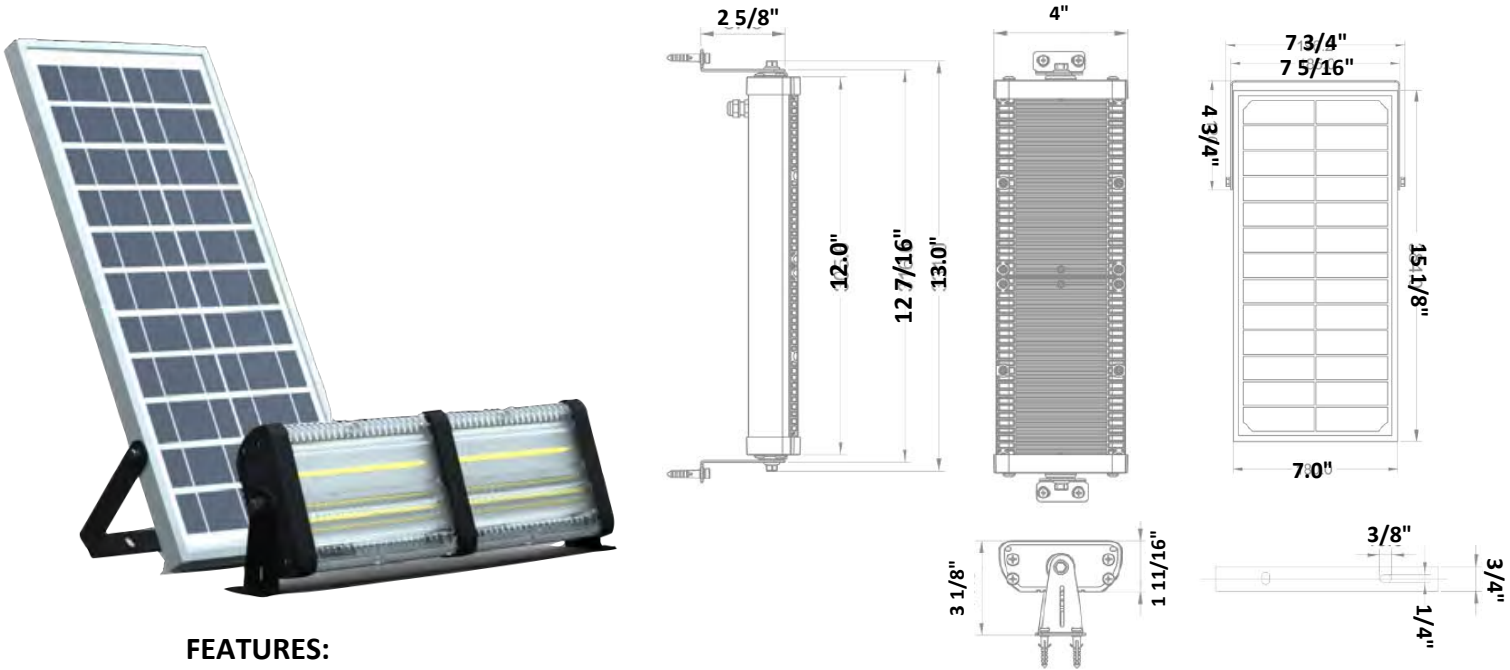


FEATURES:

- High sensitivity Photosensor Switch (No Motion Sensor)
- 7.5 Hour Charge Time
- 3-5 Day Run Time
- Charging Temperature: 32°F -113°F
Discharging Temperature: -4°F-140°F
- High Lumen Output LEDs
- Power Source: Epoxy Mono-Crystalline Solar Panel - 5W
- IP65 Wet Location Rated
- Easy Installation, 2 Year Warranty
- 11 Ft Cord

Part#	CCT	Lumens	Light Pattern	Dimming
72537	4000K	6,000	120°	N/A


PHOTOMETRY

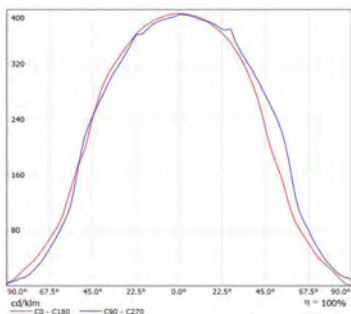

Illumination Curve



Road Simulated Diagram



Luminance Distribution



72537 - SOLAR FLOOD LIGHT

60W 4000K

Technical Specifications:

Electrical:

Power: Epoxy Mono-Crystalline, 14V/5W

Product Parameters:

Wattage: 60W

Solar Panel :10W

CCT: 4000K (Neutral White)

PC Sensor Specifications:

Beam Angle: 120°

Component Specifications:

LED: SMD 2835

Comes with Li-ion Battery

Capacity: 3.7V/28.86WH 2.6AH/PC

Charging/Discharging Temp:

32-113°F / -4°-140°F

Charging Time: 7.5 hours

Ra 80+

Non-Dimmable

Temperature Ratings:

Operating Temperature: -4°F to 140°F

Charging Temperature: 32°F -113°F

Discharging Temperature: -4°F-140°F

Construction:

Housing: Thermal Conductive Plastic

IP Rating: IP65 Wet Location Rated

Mounting: Wall Mount

Carton Qty: 1

Warranty:

Morris Products carries a 2 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).