




72669 - 10" COMMERCIAL RECESSED DOWNLIGHT

40W 5000K 120-277V

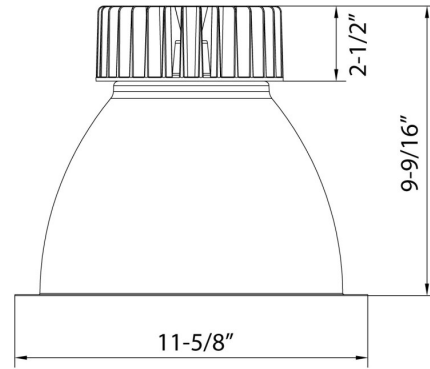


FEATURES:

- Ideal for retrofit applications
- Aluminum housing/trim - paintable
- 0-10V dimming
- 50,000 + hour LED life expectancy
- 5 Year Warranty
- IP43 Damp Location Rated
- ETL Listed, Energy Star Listed
- Order Qty of 1 = 1 Piece
- Contains a 15" Greenfield wire whip to driver and line side with box connectors included for easy install

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Input Current @ 120V	Lumens/ Watt	Energy Star
72669	White	40W	3600	5000K	120-277	.3441A	90	Yes

PHOTOMETRY

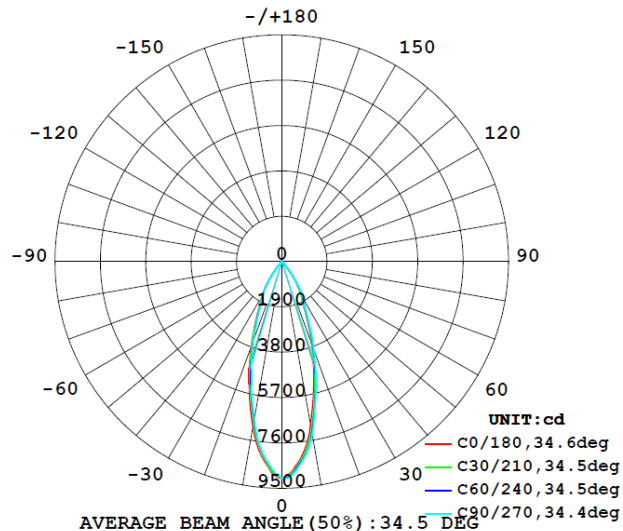



72669 - 10" COMMERCIAL RECESSED DOWNLIGHT

40W 5000K 120-277V

Technical Specifications:

Electrical:

Input Voltage: 120 - 277

Current: .3441A @ 120V

Frequency: 60Hz

Power Factor: $\geq .9$

Product Parameters:

40 Watts

Efficacy: 90 lumens per watt

50,000+ LED Life Span

CCT: 5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 35°

BUG Rating: N/A

CRI: ≥ 82.1

R9: 9

DUV: 0.00075

Chromaticity (x,y): x=.3895; y= .3838

Chromaticity (u,v): u=.2282; v= .3373

Component Specifications:

LED: SSC3030

Driver: 120-277V 50-60HZ

Surge Protection: 2500KV

Dimming: 0-10V Dimming

Operating Temperature:

Minimum Starting -31° - 122° F

Construction:

Housing: Aluminum Housing

White Trim

IP Rating: IP43 Wet Indoor Location Rated

Lens Material: Frosted Polycarbonate Lens

Mounting: Ceiling Mount

Listings: ETL, Energy Star

Carton Qty: 1

Weight: 1 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).