




# 72680B - 4" WAFER DOWNLIGHT

COLOR SELECTABLE SMOOTH 9W

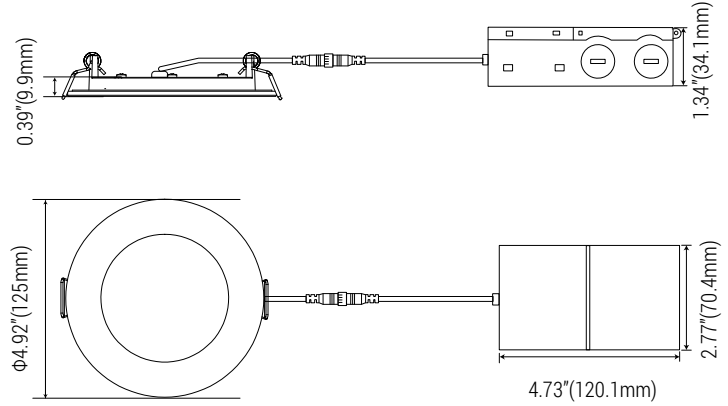

### FEATURES:

- 5 CCT COLOR SELECTABLE: 2700K, 3000K, 3500K, 4000K, 5000K
- 120° beam angle
- cETLus, Energy Star Listed
- IC rated for direct contact with insulation
- Wet-location rated, ideal for bathrooms, laundry, porches and garage work rooms
- No existing recessed housing or junction box required. Suitable for most new constructions
- With Smooth Trim
- Title 24/JA8 Compliant for High Efficacy LED Lighting in California

Part#	Housing Color	Size	Wattage	Lumens	CCT	Voltage	Replaces incandescent	CRI
72781B	SMOOTH	3"	6W	380	2700/3000/ 3500/4000/ 5000K	120V	50W	80
72680B	SMOOTH	4"	9W	675	2700/3000/ 3500/4000/ 5000K	120V	50W	80
72682B	SMOOTH	6"	12W	1000	2700/3000/ 3500/4000/ 5000K	120V	75W	80
72783B	SMOOTH	8"	18W	1440	2700/3000/ 3500/4000/ 5000K	120V	100W	80
72784B	BAFFLE	4"	9W	675	2700/3000/ 3500/4000/ 5000K	120V	50W	80
72785B	BAFFLE	6"	12W	1000	2700/3000/ 3500/4000/ 5000K	120V	75W	80



# 72680B - 4" WAFER DOWNLIGHT

COLOR SELECTABLE SMOOTH 9W

## TECHNICAL SPECIFICATIONS:

**VOLTAGE:** 120V

**POWER FREQUENCY:** 60 Hz

**POWER FACTOR:** > 0.9

**5 CCT:** 2700K/3000K/3500K/4000K/5000K

**CRI:** 90

**BEAM ANGLE:** 120 Degrees

**LIFESPAN:** >50,000 Hours

**OPERATING TEMP:** Minimum Starting -4° - 113° F

**DIMMABLE:** Compatible with most triac dimmers to give user a smooth 100%-10%

dimming to choose the desired brightness.

**RATING:** Suitable for wet locations - IP43

### **WARRANTY:**

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

## CONSTRUCTION:

**HOUSING:** PS driver housing and Aluminum reflector with architectural white finish

**IP RATING:** IP43 Wet Indoor Location Rated

**LENS MATERIAL:** Adjustable Frosted Polystyrene Lens

**MOUNTING:** No existing recessed housing or junction box required. Suitable for most new constructions.

Install J-Box in ceiling beam, and insert light right into drywall opening.

**LISTINGS:** cETLus, Energy Star, Title 24/JA8 Compliant

**CARTON QTY:** 24

**N.W. :** 7.44 KGS

**G.W. :** 9.3 KGS

**CBM :** 0.036

Easily flip the switch for desired CCT



Product view



Beam Angle 120°

