



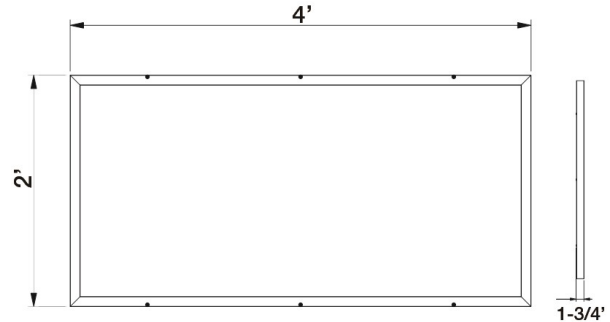

72802-72804 - SURFACE MOUNT PANELS

COLOR & WATTAGE SELECTABLE

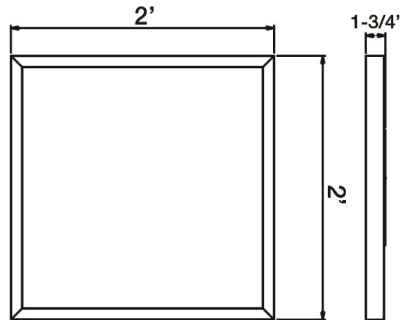

FEATURES:

- Integral Surface Mount Frame & Fixture for Fast, Cost Effective Mounting to Sheetrock
- Reduced Labor Cost
- Low Profile
- 2x2 - Integral bracket mount design
- 2X4 - Screw mount (Thru Trim) design
- Samsung 2835 LEDs
- Aluminum Frame
- Polystyrene Diffuser
- IP40 Rated
- 5 Year Warranty
- Operating Temperature: -13°F - 104°F


Part#	Wattage	Volts	Size	Lumens	CCT	CRI	Dimming	Lumens Per Watt
72802	20/25/30/36/40	120-277V	2x2	4,901	3.5K/4.1K/5K	83	0-10V	126
72804	25/30/40/45/50	120-277V	2x4	6,373	3.5K/4.1K/5K	83	0-10V	126



72802-72804 - SURFACE MOUNT PANELS

COLOR & WATTAGE SELECTABLE


72802

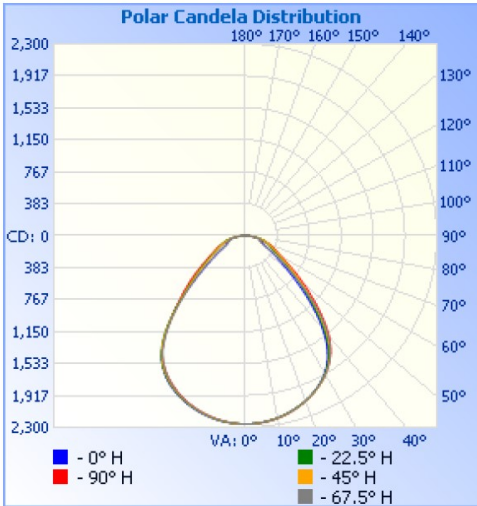


Illuminance at a Distance

	Center Beam fc	Beam Width	
17.0ft	7.81 fc	33.4 ft	35.2 ft
34.0ft	1.95 fc	66.7 ft	70.4 ft
51.0ft	0.87 fc	100.1 ft	105.6 ft
68.0ft	0.49 fc	133.4 ft	140.8 ft
85.0ft	0.31 fc	166.8 ft	176.0 ft
102.0ft	0.22 fc	200.2 ft	211.2 ft

■ Vert. Spread: 88.9°
■ Horiz. Spread: 92.0°

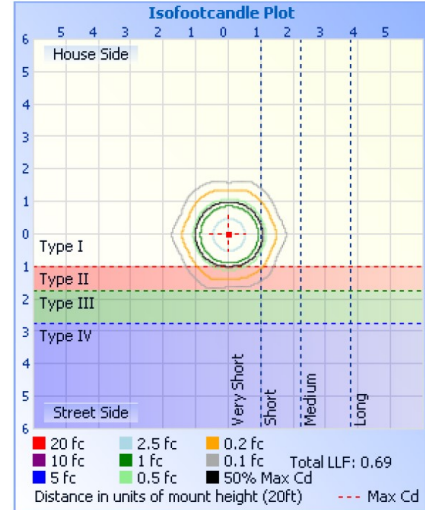


72804

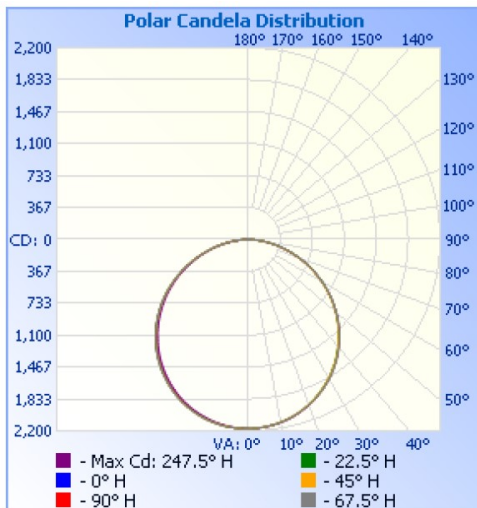

Illuminance at a Distance

	Center Beam fc	Beam Width	
17.0ft	7.52 fc	53.2 ft	52.8 ft
34.0ft	1.88 fc	106.5 ft	105.6 ft
51.0ft	0.84 fc	159.7 ft	158.4 ft
68.0ft	0.47 fc	213.0 ft	211.2 ft
85.0ft	0.30 fc	266.2 ft	264.0 ft
102.0ft	0.21 fc	319.5 ft	316.8 ft

■ Vert. Spread: 114.9°
■ Horiz. Spread: 114.4°

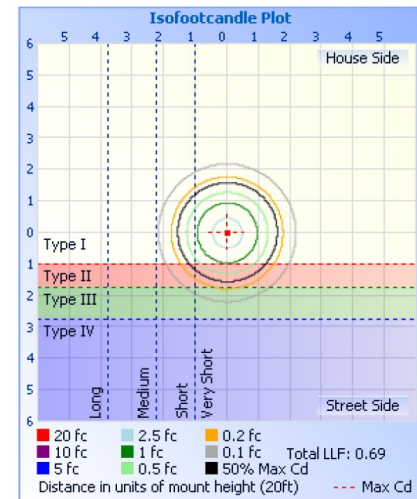



72802-72804 - SURFACE MOUNT PANELS

COLOR & WATTAGE SELECTABLE

Additional Technical Specifications:

Part#	Voltage	Current (A)	PF	THD	DUV	Chromacity (x,y)	Chromacity (u,v)	Frequency
72802	120-277V	3.5K 0.328	0.9	17.01%	3.5K -0.0012	3.5K X=0.4006 Y=0.3856	3.5K U=0.2347 V=0.5084	50/60Hz
		4.1K 0.326			4.1K 0.0003	4.1K X=0.3812 Y=0.3778	4.1K U=0.2252 V=0.5022	
		5K 0.328			5K 0.0033	5K X=0.3480 Y=0.3607	5K U=0.2099 V=0.4895	
72804	120-277V	3.5K 0.4219	0.9	11.2%	3.5K -0.0003	3.5K X=0.4047 Y=0.3897	3.5K U=0.2357 V=0.5107	50/60Hz
		4.1K 0.4162			4.1K 0.0005	4.1K X=0.3793 Y=0.3772	4.1K U=0.2242 V=0.5016	
		5K 0.4186			5K 0.0030	5K X=0.3506 Y=0.3619	5K U=0.2111 V=0.4904	

Component Specification:

LED: Samsung 2835

50,000+ Hour L70 Life Span

Operating Temperature:

-13°F - 104°F

Construction:

Housing: Aluminum Frame

Lens Material: Polystyrene

IP Rating: IP40

Mounting:

Ceiling

Listings:

ETL Listed

DLC Listed

Carton Qty: 4

Minimum Order Qty: 4

Warranty

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).