# 73054 - ROUND HEAD COMBO EXIT EMERGENCY LIGHT

HIGH OUTPUT RED LETTERS, WHITE HOUSING
REMOTE CAPABLE

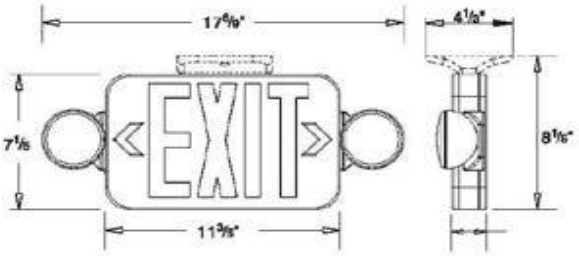


**FEATURES:**

- Completely Self-Contained
- Fully Automatic Operation
- Compact, Low Profile Designs in Neutral Finish
- Push to Test Switch
- 3.6 Volt Maintenance Free Ni-Cad Battery
- Environmental Coated, Solid State Charger
- 2 x 12 LED Fully Adjustable Glare Free Lamps
- Automatic, Low Voltage Disconnect (LVD)
- Universal transformer for 120 or 277 VAC
- Universal J-Box Mounting Plate

· Injection Molded, V-O Flame Retardant, High Impact, Thermoplastic Housing
· Integral wiring channels for ease of installation
· Charge Rate/Power on LED Indicator Light
· 90 Minute Emergency Operation
· Rated for Damp Location
· Remote Capability for up to 2 Additional Standard Remote Lighting Fixtures:
  - 2 heads - 4 hours operation
  - 3 heads - 2 hours operation
  - 4 heads - 1.5 hours operation

| Part# | Type | Volts | LED Color | Housing Color | Battery | Lumens Per Head |
|---|---|---|---|---|---|---|
| 73054 | High Output, Remote | 120/277 | Red | White | Ni-Cad | 76 |

**Dimension Information**

| | |
|---|---|
| L Inches | 11.60 |
| H Inches | 7.20 |
| Depth Inches | 2.00 |

**Specifications**

| | |
|---|---|
| Input Rating Amps: | 31.1 mA @ 120V, 12.9 mA @277V |
| Input Rating Watts: | 4.12W @ 120V, 3.2W @ 277V |
| Output Load: | 10.8W Integral |
| Lamp Type: | LED - 12 LED Per Head 76 Lumens Per |
| Lamp Lumen Output: | Head 76 Lumens Per Head |
| Voltage Rating: | 120/277 |
| Frequency: | 60 Hz |
| Flammability Rating: | UL94V-0 |
| Battery Operation: | 3.6 Volt Nickel Cadmium - 90 Minutes Minimum |

**Packaging**

| | |
|---|---|
| Box Qty | 1 |
| Master Carton Qty | 6 |

**Certifications**

| | |
|---|---|
| UL | UL 924 |
| cULus | Yes |
| RoHS | Yes |