




Catalog Number	73532
UPC Number	60198673532
Description	High Output Combination Exit/Emergency Light LED Sign LED Lamps Self Diagnostic

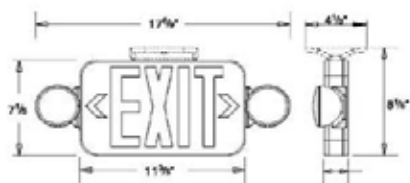

Features

- Self Diagnostic Test Feature continually diagnoses units performance and tests system to ensure reliable operation and to meet electrical & Life Safety Codes
- Completely Self-Contained
- Fully Automatic Operation
- Compact, Low Profile Designs in Neutral Finish
- Push to Test Switch
- 3.6-Volt Sealed Ni-Cad Battery
- Environmental Coated, Solid State Charger
- 2 x 12 LED Fully Adjustable Glare Free Lamps
- Automatic, Low Voltage Disconnect (LVD)
- Universal Transformer for 120 or 277 VAC
- Universal J-Box Mounting Plate
- Injection Molded, V-O Flame Retardant, High Impact, Thermoplastic Housing
- Integral wiring channels for ease of installation
- Charge Rate/Power on LED Indicator Light
- 90 Minute Emergency Operation
- Rated for Damp Location
- Self Diagnostic Features:
On-Line real time monitoring of battery charging, disconnection or failure and local or remote lamp failure
Self Testing and 15 Minute discharge every 30 days
Self Testing and 90 Minute discharge annually

Dimension Information

L Inches (mm)	11.60
H Inches (mm)	7.20
Depth Inches (mm)	2.00

Specifications

Input Rating Amps:	.06
Input Rating Watts:	3.0 @ 120V 3.0 @ 277V
Lamp Type: Voltage	LED
Rating: Flammability	120/277
Rating: Battery	UL94V-0
Operation:	3.6V Sealed Ni-Cad - 90 Minutes Minimum

Packaging

Box Qty	1
Master Carton Qty	6

Certifications

UL	UL 924
cUL	No
RoHS	Yes

Warranty

Five Years