




# 74008C - LED AREA LIGHT SHOEBOX GEN 4

120-277V 150/200W 4000K




Twist Lock Receptacle & Shorting Cap Included  
Photocell Sold Separately - Cat# 39106



Adapter  
Included with fixture



Trunnion  
Sold Separately



Yoke  
Sold Separately

150-200W

## FEATURES:

- SMD 3030 LEDs
- Wattage Selectable
- Corrosion resistant Die Cast Aluminum housing
- Polycarbonate Optic Lens
- Superior Architectural Powder Coat Finish
- Stainless Steel Hardware
- Photo Control must be Purchased Separately
- Light Pattern: Type III
- IP65 (NEMA 4X) Dust & Water Tight
- cULus Listed for Wet Locations
- DLC PRODUCT ID#: P5GFC53T
- 5 Year Warranty





Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Beam Angle	Lumens/ Watt	DLC PRODUCT ID#:
74008C	Bronze	150W/200W	27,351 @200W	4000K	120-277V	142°	132lm/w	PAUBFXTO



# 74008C - LED AREA LIGHT SHOEBOX GEN 4

120-277V 150/200W 4000K

## PHOTOMETRY:

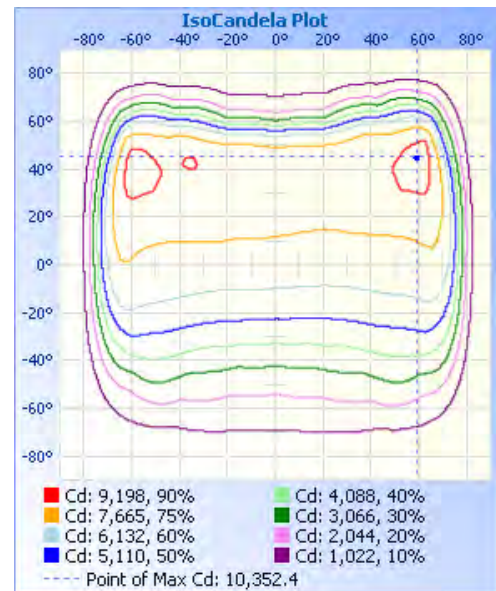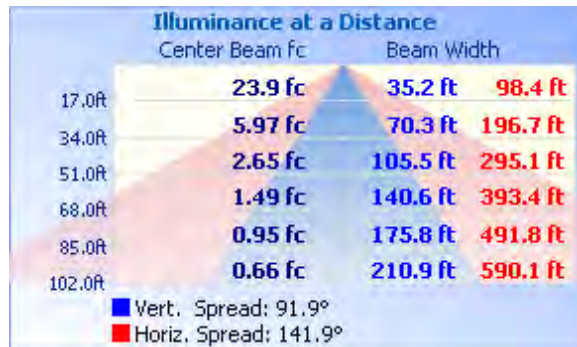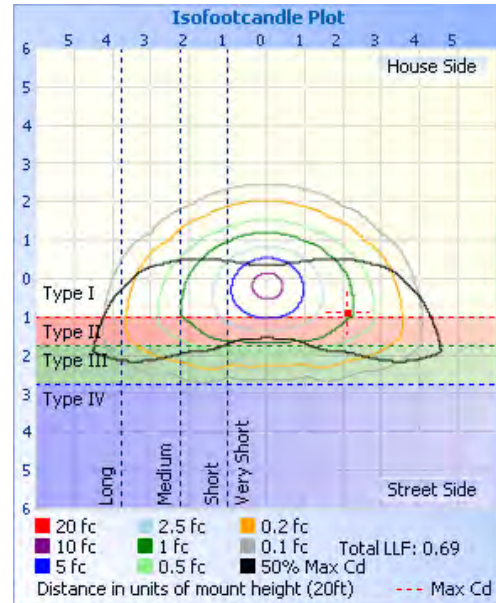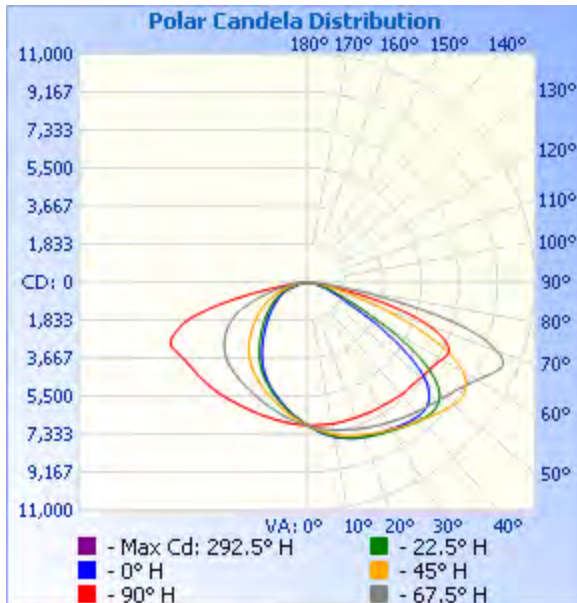



# 74008C - LED AREA LIGHT SHOEBOX GEN 4

120-277V 150/200W 4000K

## Technical Specifications:

### Electrical:

Input Voltage: 120-277V

Current: .75A @ 277V

Frequency: 60Hz

Power Factor:  $\geq 0.9$

THD: 15.7% @ 277V

### Product Parameters:

150/200 Watts

Efficacy: 132 lumens per watt

50,000+ LED Life Span

CCT: 4000K

### Chromaticity Measurements:

Beam Angle: 142°

CRI: 74

R9: -29

DUV: 0.002

Chromaticity (x,y): x=0.3333; y= 0.3460

Chromaticity (u,v): u=0.2056; v= 0.4801

### Component Specifications:

LED: SMD3030

Driver Voltage: 120-277V

Frequency: 50-60HZ

**Dimming:** 0-10V

### **\*Photo Control:**

Twist lock receptacle and shorting included.

Photocell sold separately.

LED Twist-Lock Style Photocells: **39106** (120-277V)

LED Twist-Lock Style Photocells: **39107** (480V)

\*Twist lock receptacle is installed on fixture and shorting cap is include in the box

### Operating Temperature:

Minimum Starting: -22°F To 122°F

### Construction:

Housing: Corrosion resistant Die Cast Aluminum housing

IP Rating: IP65 Wet Location Rated

Lens Material: Polycarbonate

EPA: 1.53 ft²

Weight: 11.7lbs

Mounting Accessories Sold Separately

### Listing:

cULus

DLC PRODUCT ID#: PAUBFXTO

### Accessories (Sold Separately):

- Pole Arm Mount (80-300W) Bronze - For Round and Square Poles - CAT#: 74032A
- Slipfitter Mount (80-300W) Bronze - CAT#: 74034A
- Trunnion Mount (80-300W) Bronze - CAT#: 74038C
- Universal Mount (80-300W) Bronze - CAT#: 74043A
- Yoke Mount (150-200W) Bronze - CAT#: 74036C
- Microwave Motion Sensor (**120-277V and 480V Only**) - CAT#: 74072C
- Microwave Motion Sensor Remote (Optional, for use with 74072C) -CAT#: 74188B

### Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).