





74024C - LED AREA LIGHT SHOEBOX GEN 4


120-277V 240/300W 4000K



Adapter
Included with fixture



Trunnion
Sold Separately



Yoke
Sold Separately

150-200W

Twist Lock Receptacle & Shorting Cap Included
Photocell Sold Separately - Cat# 39106

FEATURES:

- SMD 3030 LEDs
- Wattage Selectable
- Corrosion resistant Die Cast Aluminum housing
- Polycarbonate Optic Lens
- Superior Architectural Powder Coat Finish
- Stainless Steel Hardware
- Photo Control must be Purchased Separately
- Light Pattern: Type III
- IP65 (NEMA 4X) Dust & Water Tight
- cULus Listed for Wet Locations
- DLC PRODUCT ID#: P5GFC53T
- 5 Year Warranty





Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Beam Angle	Lumens/ Watt	DLC PRODUCT ID#:
74024C	Bronze	240W/300W	43,697 @300W	4000K	120-277V	144°	145m/w	PAK96LNT



74024C - LED AREA LIGHT SHOEBOX GEN 4

120-277V 240/300W 4000K

PHOTOMETRY:

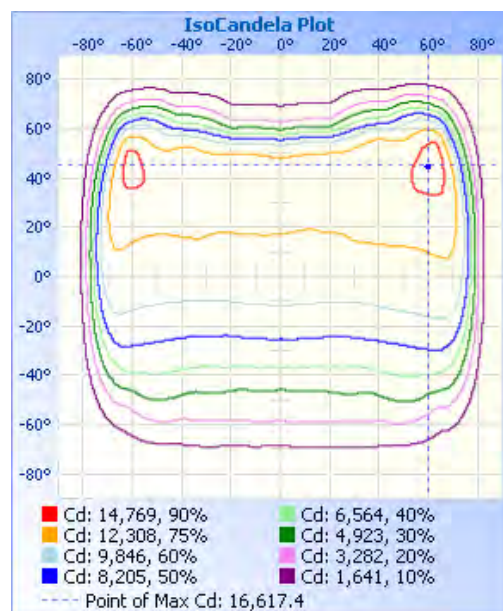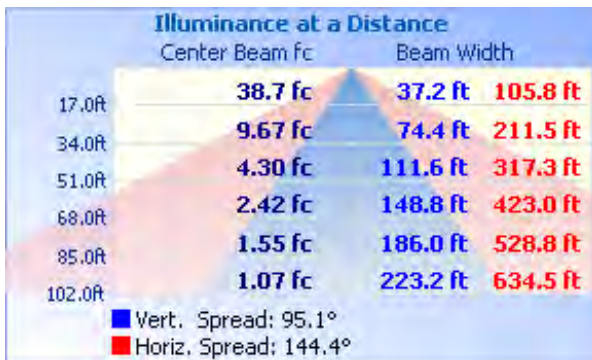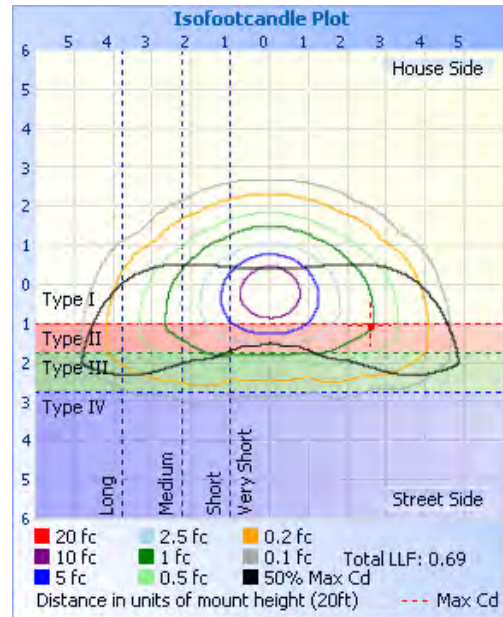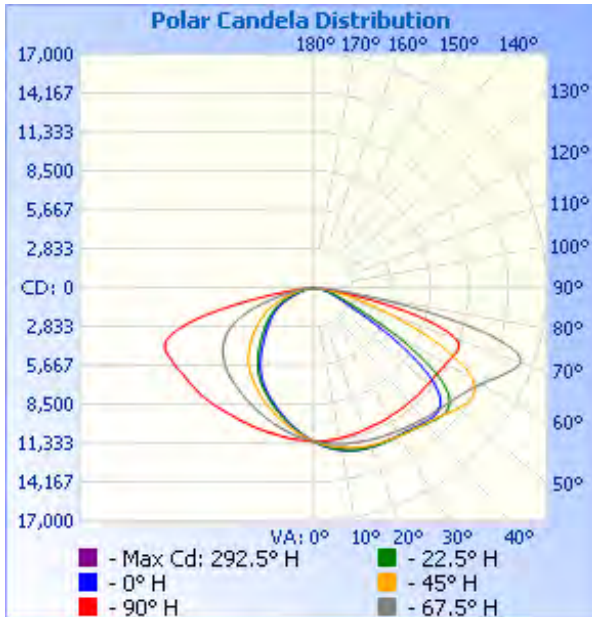



74024C - LED AREA LIGHT SHOEBOX GEN 4

120-277V 240/300W 4000K

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: 1.13A @ 277V

Frequency: 60Hz

Power Factor: ≥ 0.9

THD: 9% @ 277V

Product Parameters:

240/300 Watts

Efficacy: 145 lumens per watt

50,000+ LED Life Span

CCT: 4000K

Chromacity Measurements:

Beam Angle: 144°

CRI: 72

R9: -33

DUV: -0.0002

Chromaticity (x,y): x=0.4375; y= 0.4038

Chromaticity (u,v): u=0.2511; v= 0.5214

Component Specifications:

LED: SMD3030

Driver Voltage: 120-277V

Frequency: 50-60HZ

Dimming: 0-10V

*Photo Control:

Twist lock receptacle and shorting included.

Photocell sold separately.

LED Twist-Lock Style Photocells: **39106** (120-277V)

LED Twist-Lock Style Photocells: **39107** (480V)

*Twist lock receptacle is installed on fixture and shorting cap is include in the box

Operating Temperature:

Minimum Starting: -22°F To 122°F

Construction:

Housing: Corrosion resistant Die Cast Aluminum housing

IP Rating: IP65 Wet Location Rated

Lens Material: Polycarbonate

EPA: 2.51 ft²

Weight: 16.3lbs

Mounting Accessories Sold Separately

Listing:

cULus

DLC PRODUCT ID#: PAK96LNT

Accessories (Sold Separately):

- Pole Arm Mount (80-300W) Bronze - For Round and Square Poles - CAT#: 74032A
- Slipfitter Mount (80-300W) Bronze - CAT#: 74034A
- Trunnion Mount (80-300W) Bronze - CAT#: 74038C
- Universal Mount (80-300W) Bronze - CAT#: 74043A
- Yoke Mount (240-300W) Bronze - CAT#: 74737C
- Microwave Motion Sensor (**120-277V and 480V Only**) - CAT#: 74072C
- Microwave Motion Sensor Remote (Optional, for use with 74072C) -CAT#: 74188B

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).