




74088 - LED AREA LIGHT SHOEBOX GEN 4

CCT & WATTAGE SELECTABLE
60/80/100W 120-277V 3K-5K

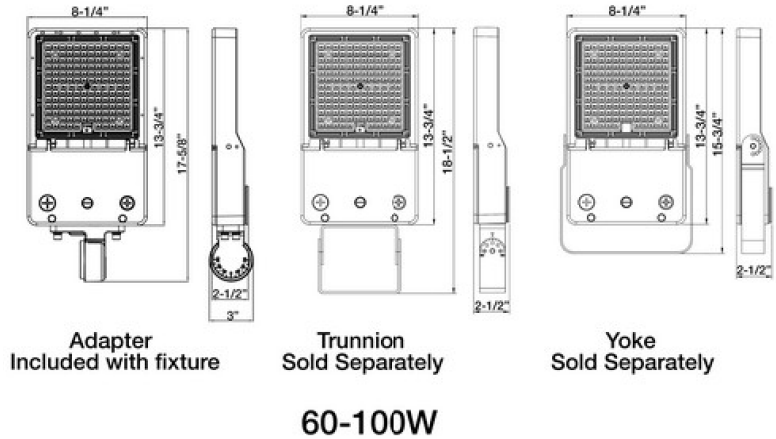

FEATURES:

- SMD 3030 LEDs
- Color and Wattage Selectable
- Corrosion resistant Die Cast Aluminum housing
- Polycarbonate Optic Lens
- Superior Architectural Powder Coat Finish
- Stainless Steel Hardware
- Photo Control must be Purchased Separately
- Light Pattern: Type III
- IP65 (NEMA 4X) Dust & Water Tight
- cULus Listed for Wet Locations
- DLC PRODUCT ID#: P10HAA8H
- 5 Year Warranty





Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Beam Angle	Lumens/Watt	DLC PRODUCT ID#:
74088	Bronze	60/80/100W	13,800 @80W	3K/4K/5K	120-277V	134°	138lm/w	P10HAA8H



74088 - LED AREA LIGHT SHOEBOX GEN 4

CCT & WATTAGE SELECTABLE
60/80/100W 120-277V 3K-5K

PHOTOMETRY

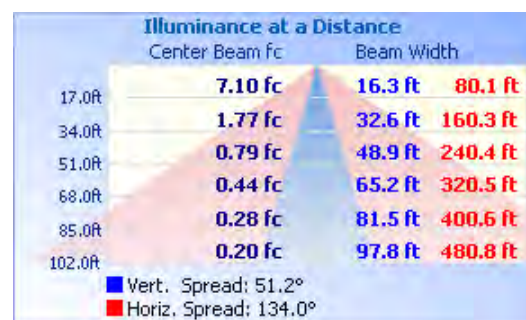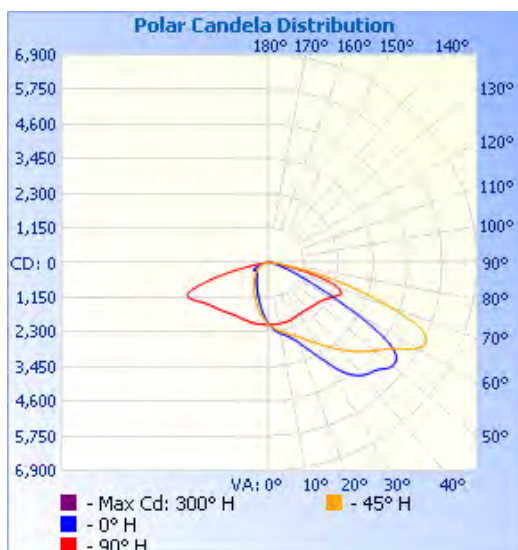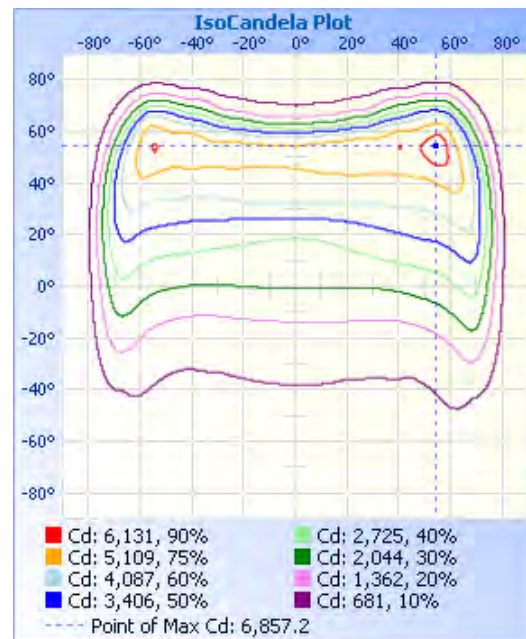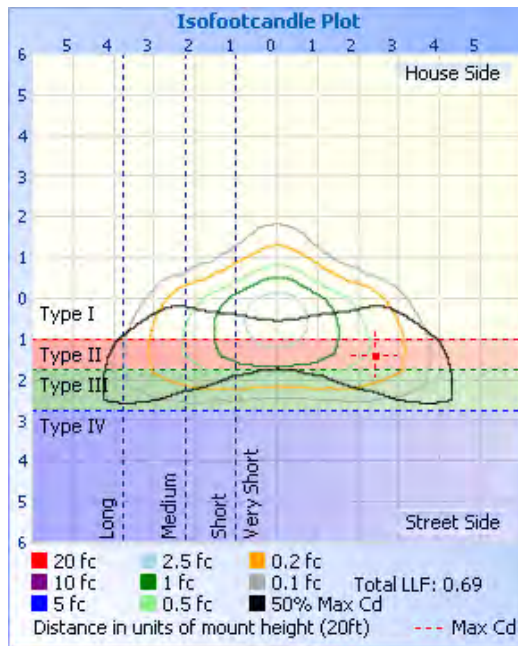



74088 - LED AREA LIGHT SHOEBOX GEN 4

CCT & WATTAGE SELECTABLE
60/80/100W 120-277V 3K-5K

TECHNICAL SPECIFICATIONS:

Electrical:

Input Voltage: 120-277V

Current: .32A @ 277V

Frequency: 60Hz

Power Factor: ≥ 0.9

THD: 15%

Product Parameters:

60/80/100 Watts

Efficacy: 138 lumens per watt

50,000+ LED Life Span

CCT: 3000K/4000K/5000K

Chromaticity Measurements:

Beam Angle: 134°

Reported CRI: 70

Reported R9: -31

DUV: 0.000001

Chromaticity (x,y): x=0.4378; y= 0.4042

Chromaticity (u,v): u=0.2510; v= 0.5216

Component Specifications:

LED: SMD3030

Driver Voltage: 120-277V

Frequency: 50-60HZ

Dimming: 0-10V

*Photo Control:

Twist lock receptacle and shorting included.

Photocell sold separately.

LED Twist-Lock Style Photocells: **39106** (120-277V)

LED Twist-Lock Style Photocells: **39107** (480V)

*Twist lock receptacle is installed on fixture and shorting cap is include in the box

Operating Temperature:

Minimum Starting: -22°F To 122°F

Construction:

Housing: Corrosion resistant Die Cast Aluminum housing

IP Rating: IP65 Wet Location Rated

Lens Material: Polycarbonate

Mounting Accessories Sold Separately

Listing: cULus

DLC PRODUCT ID#: P1OHAA8H

EPA: 1.15 ft²

Accessories (Sold Separately):

- Pole Arm Mount (80-300W) Bronze - For Round and Square Poles - CAT#: 74032A
- Slipfitter Mount (80-300W) Bronze - CAT#: 74034A
- Trunnion Mount (80-300W) Bronze - CAT#: 74038C
- Universal Mount (80-300W) Bronze - CAT#: 74043A
- Yoke Mount (60-100W) Bronze - CAT#: 74733C
- Microwave Motion Sensor (**120-277V and 480V Only**) - CAT#: 74072C
- Microwave Motion Sensor Remote (Optional, for use with 74072C) -CAT#: 74188B

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).