



74101C - SPEC GRADE UFO HIGH BAY

100W 120-277V 4000K







FEATURES:

- Instant start; no flickering or humming
- 120 - 277V
- Easy to install & operate: Pendant & Surface Mount
- Operating Temperature: 40°F - 122°F
- Fin design on top to maintain proper heat dissipation
- 6KV Surge Protection
- Black, Die cast aluminum housing
- 90 degree beam angle
- 5 Year Warranty
- IP65 Rated for wet locations

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	CRI	Lumens/Watt	Dimming
74101C	Black	100W	14,116	4000K	120-277V	≥80	142 lm/w	0-10V

PHOTOMETRY:

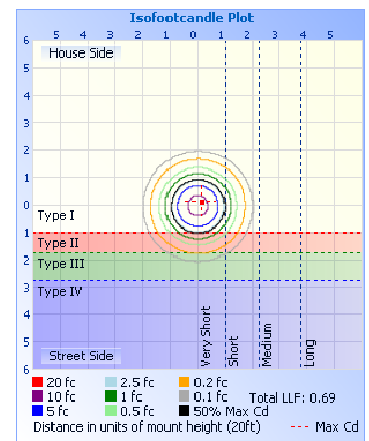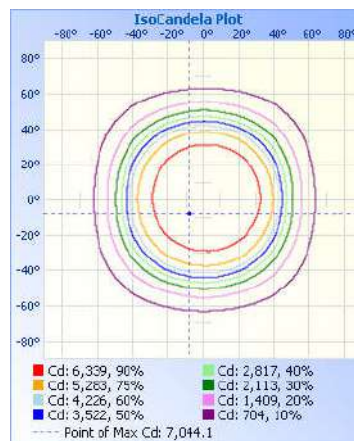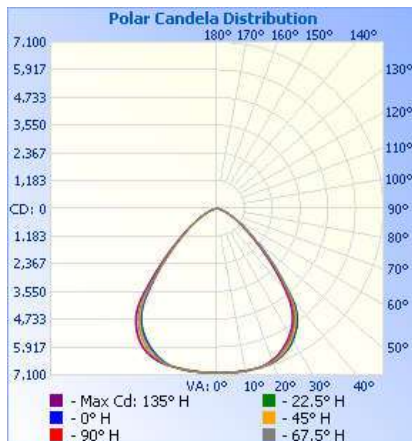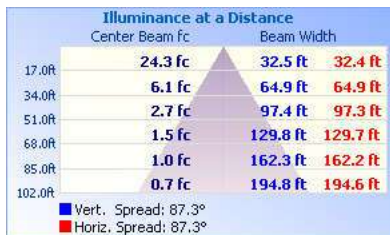



74101C - SPEC GRADE UFO HIGH BAY

100W 120-277V 4000K

TECHNICAL SPECIFICATIONS:

Electrical:

Input Voltage: 120-277V

Current: 0.846 A

Frequency: 50/60Hz

Power Factor: ≥ 0.9

THD: $\leq 20\%$

UGR: < 28

Operating Temperature:

Minimum Starting -40°F - 122°F

Construction:

Housing: Die Cast Aluminum Housing

Powder Coated

IP Rating: IP65 Damp Location Rated

Lens Material: PC

Cord Length: 6 Feet

Product Parameters:

100W

Lumens: 14,116

Efficacy: 142 Lumens Per Watt

50,000+ L70 Life Span

CCT: 4000K

Mounting: Ceiling or Pendant Mount

Listings: cULus, DLC Premium: S-GKPW1F

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

Chromacity Measurements:

Beam Angle: 90°

CRI: > 80

DUV: $+0.0002$

Component Specifications:

LED: SMD2835

Driver: 120-277VAC, 50/60Hz

6KV Surge Protection

Dimming:

0-10V / PMW

