



74103C - SPEC GRADE UFO HIGH BAY

160/200/240W 5000K 277-480V




FEATURES:

- Wattage Selectable: 160W/200W/240W
- 277-480V
- Easy to install & operate: Pendant & Surface Mount
- Operating Temperature: 40°F-122°F
- Fins on top to maintain proper heat dissipation
- 6KV Surge Protection
- Die cast aluminum housing
- 90 degree beam angle
- 5 Year Warranty
- IP65 Rated for wet locations


Part#	Housing Color	Wattage	Lumens	CCT	Voltage	CRI	Lumens/Watt	Dimming
74103C	Black	160/200/240W	33,600	5000K	277-480V	≥80	140 lm/w	0-10V

PHOTOMETRY:

Luminous Intensity Distribution Curve

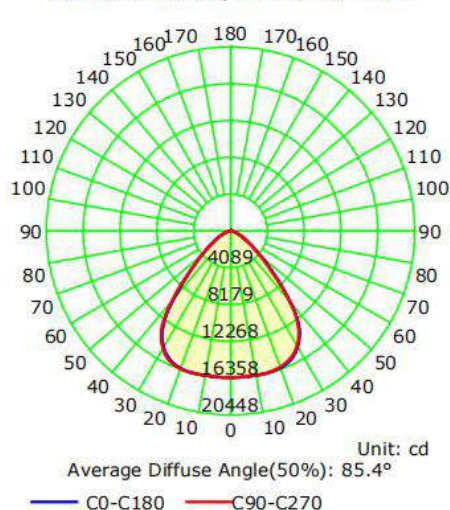

The Average Illuminance Effective Figure

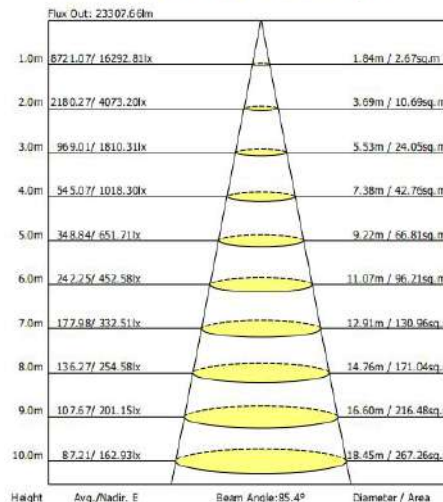



74103C - SPEC GRADE UFO HIGH BAY

160/200/240W 5000K 277-480V

TECHNICAL SPECIFICATIONS:

Electrical:

Input Voltage: 277-480V

Current: 0.855 A

Frequency: 50/60Hz

Power Factor: ≥ 0.9

THD: $\leq 20\%$

UGR: < 28

Product Parameters:

160/200/240 Watts

Lumens: 33,600

Efficacy: 140 Lumens Per Watt

50,000+ L70 Life Span

CCT: 5000K (Cool White)

Chromacity Measurements:

Beam Angle: 90°

CRI: > 80

DUV: $+0.00090$

Component Specifications:

LED: SMD2835

Driver: 277-480VAC, 50/60Hz

6KV Surge Protection

Dimming:

0-10V / PMW

Operating Temperature:

Minimum Starting -40°F - 122°F

Construction:

Housing: Die Cast Aluminum Housing

Powder Coated

IP Rating: IP65 Damp Location Rated

Lens Material: PC

Cord Length: 6 Feet

Mounting: Ceiling or Pendant Mount

Listings: cULus, DLC Premium: S-W97TMP

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

