




# 74504 - LED SMALL FLOOD

15W 120V 3000K KNUCKLE




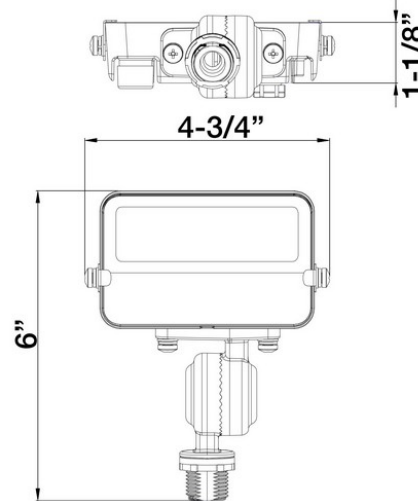


## FEATURES:

- Philips 2835 LEDs
- Integral Cooling Fin Releases Heat Efficiently to Maintain the Life of LED's & LED Driver
- Corrosion Resistant Die Cast Aluminum Housing
- Tempered Glass Lens
- Superior Architectural Powder Coat Finish
- Color Temperature: 3000K
- Operating Temperature: -40°F to 104°F
- Mount: 1/2" Knuckle
- IP65 Wet Location Rated
- UL Listed
- DLC PRODUCT ID#: PE3WPK98
- 5 Year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Beam Angle	Lumens/Watt	DLC PRODUCT ID#
74504	White	15W	1,527	3000K	120V	105°H x 99°V	102 lm/w	PE3WPK98

## PHOTOMETRY

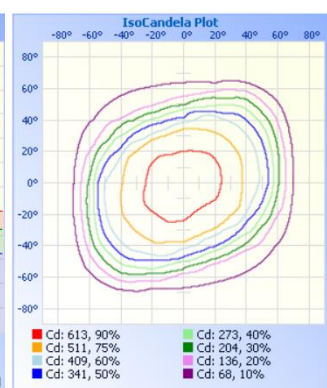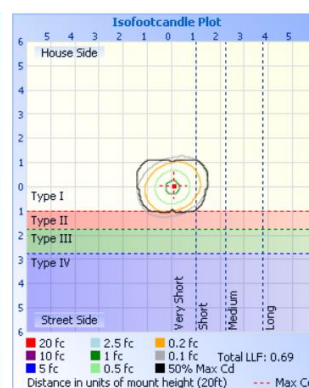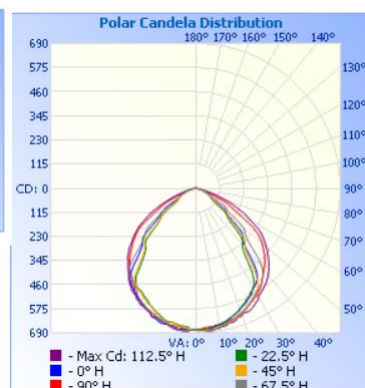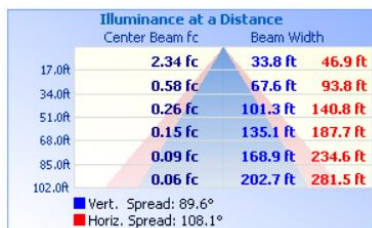



# 74504 - LED SMALL FLOOD

15W 120V 3000K KNUCKLE

## Technical Specifications:

### **Electrical:**

Input Voltage: 120V  
Current: 0.12A @ 120V  
Frequency: 60Hz  
Power Factor:  $\geq 0.9$   
THD: 13.75% @ 120V

### **Product Parameters:**

15 Watts  
Efficacy: 102 lumens per watt  
50,000+ LED Life Span  
CCT: 3000K

### **Chromaticity Measurements:**

Beam Angle:  $105^{\circ}H \times 99^{\circ}V$   
CRI:  $>70$   
R9: 0  
DUV: -0.000626  
Chromaticity (x,y):  $x=0.4413 \ y=0.4071$   
Chromaticity (u,v):  $u'=0.2521 \ v'=0.5232$

### **Component Specifications:**

LED: Philips 2835  
Driver Voltage: 120V  
Frequency: 50-60HZ

**Dimming: N/A**

### **Operating Temperature:**

Minimum Starting:  $-40^{\circ}F$  to  $104^{\circ}F$

### **Construction:**

Housing: Corrosion Resistant Die Cast Aluminum Housing

IP Rating: IP65 Wet Location

Lens Material: Tempered Glass

Mounting: 1/2" Knuckle Mount

### **Listing:**

cULus

DLC PRODUCT ID#: PE3WPK98

### **Warranty:**

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).