




# 74507 - LED SMALL FLOOD

15W 120V 5000K KNUCKLE



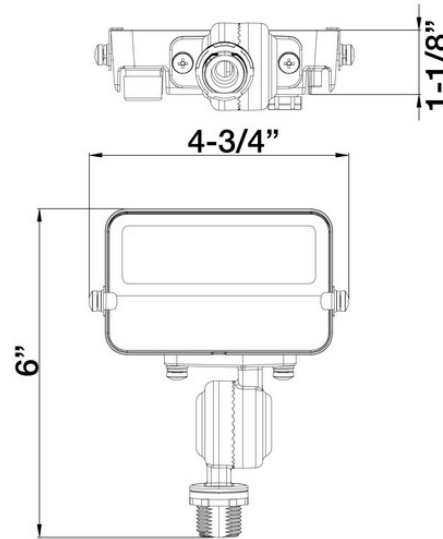


## FEATURES:

- Philips 2835 LEDs
- Integral Cooling Fin Releases Heat Efficiently to Maintain the Life of LED's & LED Driver
- Corrosion Resistant Die Cast Aluminum Housing
- Tempered Glass Lens
- Superior Architectural Powder Coat Finish
- Color Temperature: 5000K
- Operating Temperature: -40°F to 104°F
- Mount: 1/2" Knuckle
- IP65 Wet Location Rated
- UL Listed
- DLC PRODUCT ID#: PGG4C3IM
- 5 Year Warranty

| Part# | Housing Color | Wattage | Lumens | CCT   | Voltage | Beam Angle   | Lumens/Watt | DLC PRODUCT ID# |
|-------|---------------|---------|--------|-------|---------|--------------|-------------|-----------------|
| 74507 | White         | 15W     | 1,624  | 5000K | 120V    | 105°H x 99°V | 108 lm/w    | PGG4C3IM        |

## PHOTOMETRY

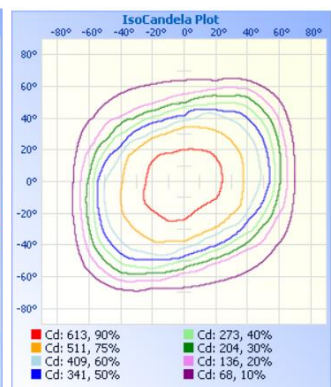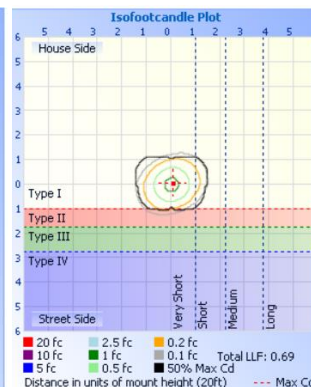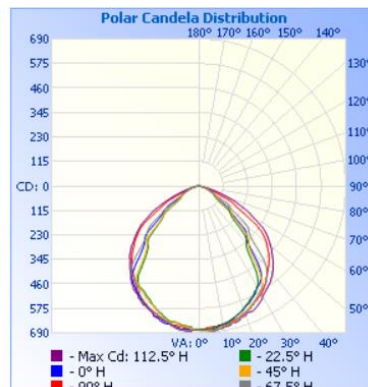



# 74507 - LED SMALL FLOOD

15W 120V 5000K KNUCKLE

## Technical Specifications:

### **Electrical:**

Input Voltage: 120V  
Current: 0.12A @ 120V  
Frequency: 60Hz  
Power Factor:  $\geq 0.9$   
THD: 13.75% @ 120V

### **Product Parameters:**

15 Watts  
Efficacy: 108 lumens per watt  
50,000+ LED Life Span  
CCT: 5000K

### **Chromaticity Measurements:**

Beam Angle: 105°H x 99°V  
CRI: >70  
R9: 0  
DUV: -0.000626  
Chromaticity (x,y): x=0.4413 y=0.4071  
Chromaticity (u,v): u'=0.2521 v'=0.5232

### **Component Specifications:**

LED: Philips 2835  
Driver Voltage: 120V  
Frequency: 50-60HZ

**Dimming:** N/A

### **Operating Temperature:**

Minimum Starting: -40°F to 104°F

### **Construction:**

Housing: Corrosion Resistant Die Cast Aluminum Housing

IP Rating: IP65 Wet Location

Lens Material: Tempered Glass

Mounting: 1/2" Knuckle Mount

### **Listing:**

cULus

DLC PRODUCT ID#: PGG4C3IM

### **Warranty:**

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).