





74666 - GEN 3 BULLET FLOOD

120-277V 39W 5000K




FEATURES:

- Operation Temperature: -40°F - 104°F
- Corrosion Resistant Die Cast Aluminum Housing
- Tempered Glass Lens
- 1/2" NPT Knuckle
- 50,000+ Hour LED Life Expectancy
- IP65(Nema 4X) Dust & Water Tight
- Listings: cULus
- DLC PRODUCT ID#: PLOWAIEH2BO5
- 5 Year Warranty

| Part# | Housing Color | Wattage | Lumens | CCT | Voltage | CRI | Lumens/Watt | Dimming |
|-------|---------------|---------|--------|-------|----------|-----|-------------|---------|
| 74666 | Bronze | 39W | 5,190 | 5000K | 120-277V | ≥70 | 133 LM/W | 0-10V |

PHOTOMETRY

80° Beam Angle

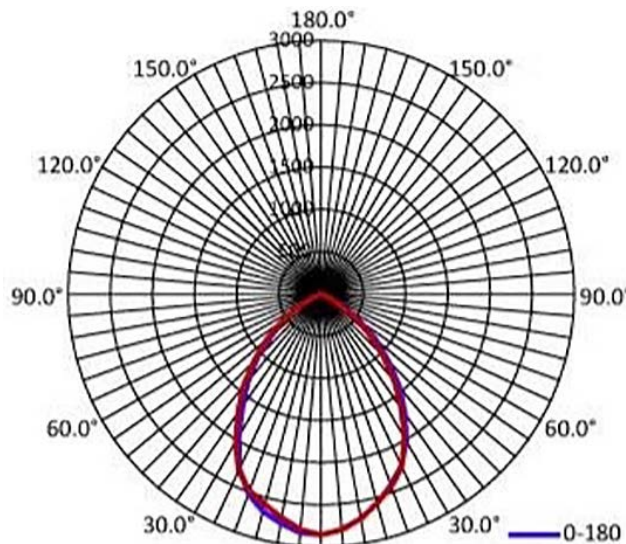



74666 - GEN 3 BULLET FLOOD

120-277V 39W 5000K

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: 0.33A @120V

Frequency: 60Hz

Power Factor: ≥ 0.99

THD: $\leq 20\%$

Product Parameters:

Wattage: 39W

Lumens: 5,190

Efficacy: 133 Lumens Per Watt

50,000+ Hour LED Life Span

CCT: 5000K

Chromaticity Measurements:

Beam Angle: 80°

R9: -29

CRI: 70/71

Component Specifications:

LED: Lumileds 2835

Driver: 120-277V 50-60HZ

Dimming: 0-10V

Operating Temperature:

Minimum Starting -40°F - 104°F

Construction:

Housing: Aluminum

Powder Coated

IP Rating: IP65

Lens Material: Tempered Glass

Mounting: 1/2" NPT Knuckle

Listings:

cULus

DLC PRODUCT ID#: PLOWAIEH2BO5

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).