




MORRIS CAT#: 75119A

LED Driverless Gooseneck Flood light

40W, 120/240/277V, 3000K, Bronze

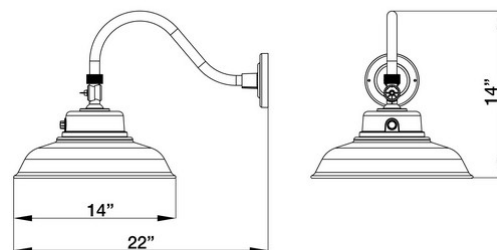


Features:

- Clear Polycarbonate Lens
- Swivel head fixture
- Operating Temperature: -40°F to 122°F
- Photocell Included
- Powder Coated: Bronze
- Aluminum Housing
- Environment: IP65 Rated -Suitable for Wet Locations
- Certification: ETL
- DLC PRODUCT ID#: S-BVUOGO
- 5 Year Limited Warranty

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC PRODUCT ID#:
75119A	40W	120/240/277	4,800	3000K	>72	N/A	Outdoor	134lm/w	S-BVUOGO

PHOTOMETRY

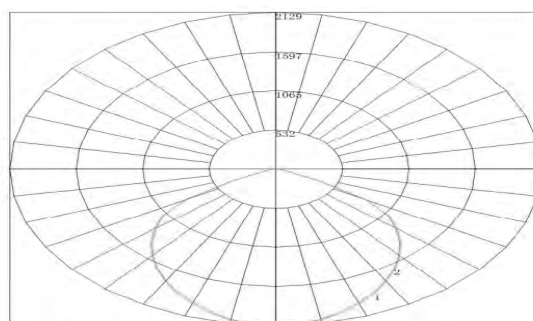

Maximum Candela = 2129.347 Located At Horizontal Angle = 0, Vertical Angle = 0
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180)
 # 2 - Vertical Plane Through Horizontal Angles (90 - 270)



MORRIS CAT#: 75119A

LED Driverless Gooseneck Flood light

40W, 120/240/277V, 3000K, Bronze

Technical Specifications:

Electrical:

Input Voltage: 120V/240V/277V

Current: .33A@120V

Frequency: 50/60Hz

Power Factor: \geq .933

THD: 12.37% @120V

Product Parameters:

Input Watts: 40W

Lumens: 4,800

Efficacy: 134 lumens per watt

50,000+ Hour L70 Life Span

CCT: 3000K (warm White)

Chromacity

Measurements:

Beam Angle: Outdoor

CRI: >72

R9: 0

Component

Specifications:

LED: LumiLED LUXEON 3030

Driver Voltage: 120/240/277V

Frequency: 50-60Hz

Dimming: N/A

Operating Temperature:

Minimum Starting: -40°F to 122°F

Construction:

Housing: Aluminum Housing

Powder Coat Finish: Bronze

IP Rating: IP65 - Suitable for wet locations

Lens Material: Clear Polycarbonate Lens

Mounting: Wall

Listings:

ETL

DLC PRODUCT ID#: S-BVUOG0

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).