



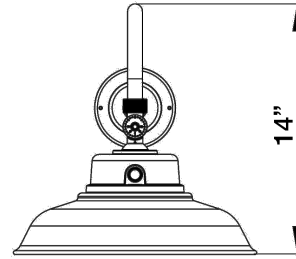

# MORRIS CAT#: 75121A

## LED Driverless Gooseneck Flood light 40W, 120/240/277V, 4000K, Black

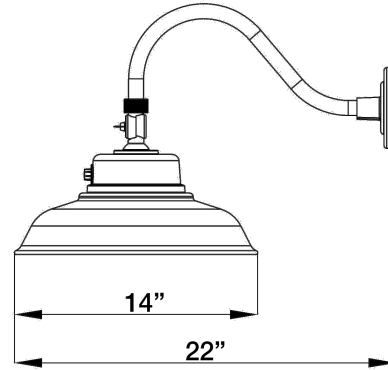


### Features:

- Clear Polycarbonate Lens
- Swivel head fixture
- Operating Temperature: -40°F to 122°F
- Photocell Included
- Powder Coated: Black
- Aluminum Housing
- Environment: IP65 Rated -Suitable for Wet Locations
- Certification: ETL
- DLC PRODUCT ID#: S-OR4MJH
- 5 Year Limited Warranty

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC PRODUCT ID#:
75121A	40W	120/240/277	4,800	4000K	>70	N/A	Outdoor	120lm/w	S-OR4MJH

### PHOTOMETRY

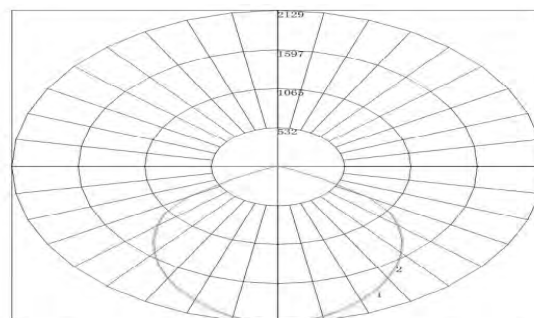

Maximum Candela = 2129.347 - Located At Horizontal Angle = 0, Vertical Angle = 0  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180)  
 # 2 - Vertical Plane Through Horizontal Angles (90 - 270)



# MORRIS CAT#: 75121A

## LED Driverless Gooseneck Flood light

### 40W, 120/240/277V, 4000K, Black

#### Technical Specifications:

##### **Electrical:**

Input Voltage: 120V/240V/277V

Current: .33A@120V

Frequency: 50/60Hz

Power Factor:  $\geq$ .99

THD: 15% @120V

##### **Product Parameters:**

Input Watts: 40W

Lumens: 4,800

Efficacy: 120 lumens per watt

50,000+ Hour L70 Life Span

CCT:4000K (Neutral White)

##### **Chromacity**

##### **Measurements:**

Beam Angle: Outdoor

CRI: >72

R9: 0

##### **Component**

##### **Specifications:**

LED: LumiLED LUXEON 3030

Driver Voltage: 120/240/277V

Frequency: 50-60Hz

**Dimming:** N/A

##### **Operating Temperature:**

Minimum Starting: -40°F to 122°F

##### **Construction:**

Housing: Aluminum Housing

Powder Coat Finish: Black

IP Rating: IP65 - Suitable for wet locations

Lens Material:Clear Polycarbonate Lens

**Mounting:** Wall

##### **Listings:**

ETL

DLC PRODUCT ID#: S-OR4MJH

##### **Warranty:**

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).