



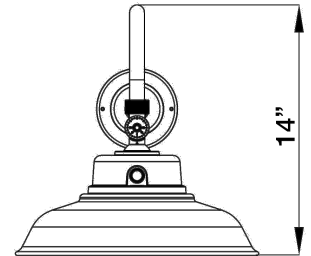

MORRIS CAT#: 75125A

LED Gooseneck Flood light

40W, 120/240/277V, 5000K Bronze

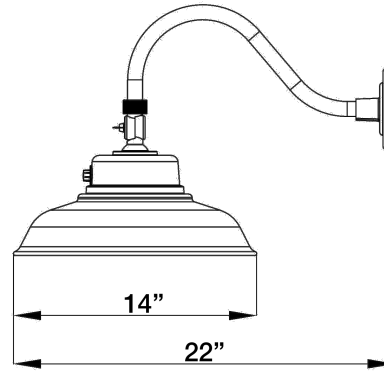


Features:

- Clear Polycarbonate Lens
- Swivel head fixture
- Operating Temperature: -40°F to 122°F
- Photocell Included
- Powder Coated: Bronze
- Aluminum Housing
- Environment: IP65 Rated -Suitable for Wet Locations
- Certification: ETL
- DLC PRODUCT ID#: S-QPWW02
- 5 Year Limited Warranty

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC PRODUCT ID#:
75125A	40W	120/240/277	4,800	5000K	>70	N/A	Outdoor	120lm/w	S-QPWW02

PHOTOMETRY

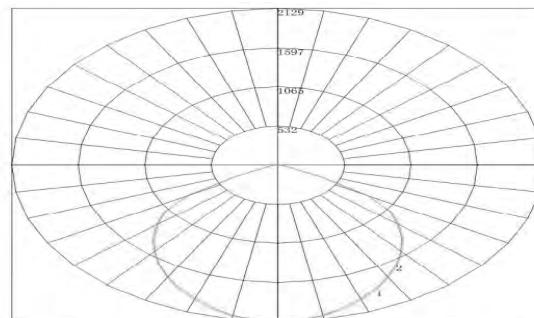

Maximum Candela = 2129.347 Located At Horizontal Angle = 0, Vertical Angle = 0
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180)
 # 2 - Vertical Plane Through Horizontal Angles (90 - 270)



MORRIS CAT#: 75125A

LED Gooseneck Flood light

40W, 120/240/277V, 5000K, Bronze

Technical Specifications:

Electrical:

Input Voltage: 120V/240V/277V

Current: .33A@120V

Frequency: 50/60Hz

Power Factor: $\geq .99$

THD: 15% @120V

Product Parameters:

Input Watts: 40W

Lumens: 4,800

Efficacy: 120 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

Chromacity

Measurements:

Beam Angle: Outdoor

CRI: >70

R9: 0

Component

Specifications:

LED: LumiLED LUXEON 3030

Driver Voltage: 120/240/277V

Frequency: 50-60Hz

Dimming: N/A

Operating Temperature:

Minimum Starting: -40°F to 122°F

Construction:

Housing: Aluminum Housing

Powder Coat Finish: Bronze

IP Rating: IP65 - Suitable for wet locations

Lens Material: Clear Polycarbonate Lens

Mounting: Wall

Listings:

ETL

DLC PRODUCT ID#: S-QPWW02

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).