UltraBright Flex-Strip

120V 5000K IP65

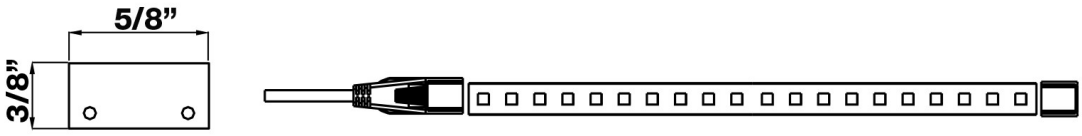

Features:

120V AC

5000K

Dimmable

SMD 5050 LED’s

5/8” Wide Flexible PCB

Length: 150’, 18’ or 6’

18” Cutting Intervals

IP65 Outdoor Rated

30,000hr + LED Life Span

Part#	Watts/Foot	Lumens/ Foot	CCT	Voltage	Beam Angle	IP Rating
75020 150’ 75135 18’ 75134 6’	2.6	150	5000	120	120°	IP65

UltraBright Flex-Strip
120V 5000K IP65

Technical Specifications:

Electrical:

Input Voltage: 120V AC

Product Parameters:

2.6 Watts Per Foot
150 Lumens Per Foot
20 LEDs Per Foot
30,000hr + LED Life Span
CCT 5000K (Cool White)

Chromacity Measurements:

Beam Angle: 120°
CRI: >80

Component Specifications:

LED: SMD 5050

Dimmable:

Yes - Dimmer Not Included

Construction:

5/8" Wide Flexible PCB
Length: 150' - 18" Cutting Intervals
IP Rating: IP65 Outdoor Rating

Mounting:

Mounting Clips & Screws:
150' & 18': 10 Clips 20 screws (Included)
6': 4 Clips 8 Screws (Included)
Wall Mount Channel: Cat# 75058 (Sold Separately)

Listings:

ETL Listed

Included in Box:

6': 1 Power Cord (Attached to strip) 4 Mounting Clips, 8 Screws
18': 1 Power Cord (Attached to strip) 10 Mounting Clips,
20 Screws
150': 1 Power Cord (attached to strip), 2 Connector Pins,
1 In-Line Connector, 1 End Cap, 10 Mounting Clips,
20 Screws, 1 Bottle of Adhesive Sealant

Accessories: Sold Separately

Installation Kit - Cat # 75046 - 1 Power Cord,
1 Connector Pin, 1 End Cap, 10 Mounting Clips,
20 Screws, 1 Bottle of Adhesive Sealant
Dimmer - 75193 (Splice onto cut strip. Includes plug)
Dimmer - 75222 (In-line for 75134 & 75135 Only)
In-Line Splice Connector - Cat# 75059
Tee Splice - Cat# 75060
Right Angle Splice Connector - Cat# 75061
6" Jump Cable - Cat# 75196
1' Jump Cable - Cat# 75197
2' Jump Cable - Cat# 75198
3' Jump Cable - Cat# 75199
Connector Pins - Cat# 75022
End Cap - Cat# 75024
Mounting Clips - Cat# 75025
Adhesive Sealant - Cat# 75216
Wall Mount Channel - Cat# 75058

Warranty:

Morris Products carries a 3 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).