





Polypropylene Stud Bushings

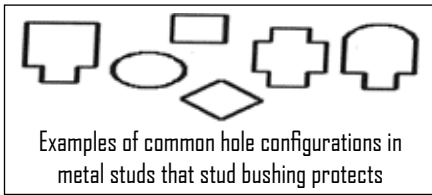

Bushings



Examples of common hole configurations in metal studs that stud bushing protects

- Fits existing irregular shaped holes in metal studs
Alleviates the need to punch holes in metal studs, weakening the structural member
- Protects wire insulation from abrasion in metal studs
- Bushing allows smooth wire pulling
- No tools needed
- Use these bushings to comply with paragraph 300-4(b)(1) of the 2005 NEC code which states that: "In both exposed & concealed locations where nonmetallic-sheathed cables pass through either factory or field punched, cut, or drilled slots or holes in metal members, the cable shall be protected by bushings or grommets covering all metal edges & securely fastened in the opening prior to installation of the cable"

DIMENSIONS = INCHES


CAT. NO.	STUD SIZE	DIMENSIONS				BAG QTY
		A	B	C	D	
21760	2X4	5.67	2.50"	.505	1.30	25

Snap Bushings



- Eliminate sharp edges & insulate your raw-edged holes in metal chassis
- Easily locks into hole firmly with fingertip pressure
- Protect electrical cables, ropes, utility lines passing through metal
- 1/8" maximum steel thickness
- Made from UL approved Nylon 6/6, 94V-2

DIMENSIONS = INCHES

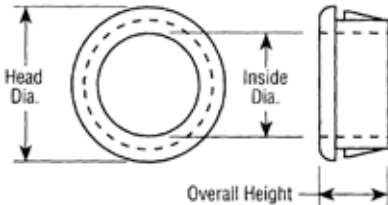

CAT. NO.	MOUNTING HOLE DIAMETER	INSIDE DIAMETER	HEAD DIAMETER	OVERALL HEIGHT	BAG QTY
22311	.28	.23	.34	.24	10
22312	.31	.23	.37	.31	10
22314	.37	.25	.47	.41	10
22314B	.37	.25	.47	.41	1,000
22316	.50	.32	.57	.41	10
22317	.55	.45	.67	.41	10
22318	.63	.48	.73	.41	10
22320	.75	.56	.85	.41	10
22322	.87 (1/2" TRADE)	.68	.94	.45	10
22324	.99	.75	1.10	.45	10
22326	1.17	.95	1.31	.45	10
22328	1.50	1.14	1.62	.45	10
22330	1.72	1.39	1.88	.46	10
22332	1.97	1.64	2.15	.46	10