





Morris Products Inc.  
 Ph: 518-743-0523  
 Fax: 518-743-0536  
 www.morrisproducts.com

**THERMOPLASTIC BASE  
 NO-CALK®  
 ROOF FLASHINGS**



**Engineering Specification:** Oatey Thermoplastic No-Calk® Roof Flashings can be used in commercial and residential applications where a watertight seal for roof penetrations around the plumbing vent pipe is required.

**Job Reference**

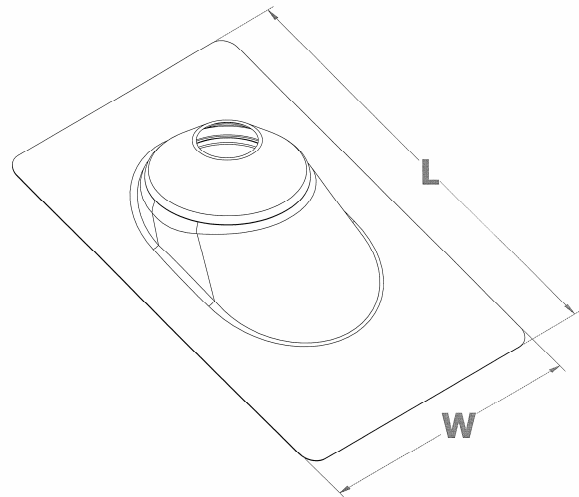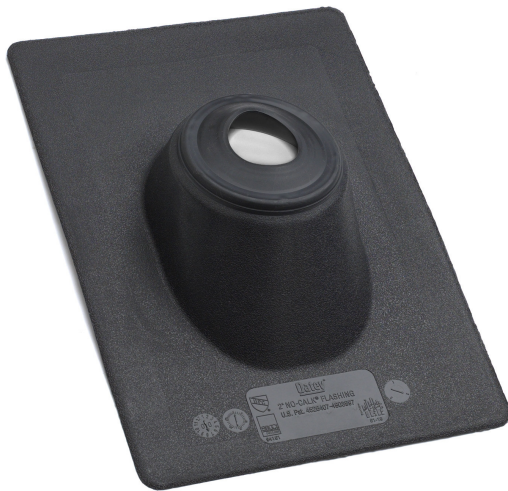

(All dimensions in inches)

- ◆ Roof Flashing slides over vent pipe for pitch to 45°
- ◆ Non-fading, non-cracking rigid black thermoplastic base
- ◆ Non-fading sealing collar
- ◆ Approved for Type B installations
- ◆ Not for hot-mopped or built-up roofs
- ◆ Do not use paint or petroleum based products on plastic bases or rubber collars

✓	Product No.	Description	Length (L)	Width (W)	PACK	CARTON WEIGHT		
	14101	11908	1-¼"-1-½"	Thermoplastic No-Calk Roof Flashing	13	9-¼	12	6 lbs.
	14102	11909	2"	Thermoplastic No-Calk Roof Flashing	13	9-¼	12	6 lbs.
	14103	11910	3"	Thermoplastic No-Calk Roof Flashing	15	11-¼	12	8 lbs.
	14104	11911	4"	Thermoplastic No-Calk Roof Flashing	16	12	12	9 lbs.



IAPMO Listed



653

Data is subject to manufacturing tolerances.