


# Heat Stabilized Nylon Cable Ties

- For High Temperature Applications up to 221°F
- One-Piece Construction
- Made from UL approved Nylon 6/6
- Flammability Rating: UL 94V-2
- Temperature Rating: -40°F to 221°F

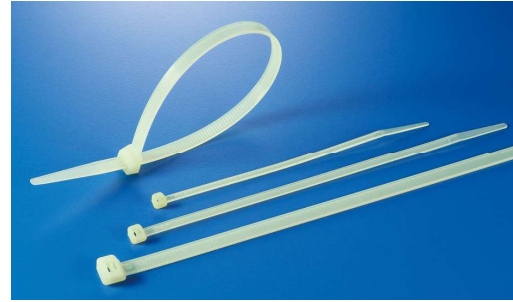

DIMENSIONS = INCHES

| CAT. NO. | TENSILE STRENGTH (LBS) | LENGTH | WIDTH | MAX BUNDLE DIA. | BAG QTY | MASTER BAG QTY |
|----------|------------------------|--------|-------|-----------------|---------|----------------|
| 20802    | 18                     | 4      | .077  | .87             | 100     | 1,000          |
| 20804    | 50                     | 8      | .126  | 2.09            | 100     | 1,000          |
| 20806    | 50                     | 11     | .189  | 3.03            | 100     | 1,000          |
| 20808    | 50                     | 14-1/2 | .189  | 4.13            | 100     | 1,000          |

# Flame Retardant Nylon Cable Ties

- Flame Retardant Self Extinguishing Properties
- Flammability Rating: UL 94V-0
- One-Piece Construction
- Made from UL approved Nylon 6/6
- Temperature Rating: -40°F to 185°F




DIMENSIONS = INCHES

| CAT. NO. | TENSILE STRENGTH (LBS) | LENGTH | WIDTH | MAX BUNDLE DIA. | BAG QTY | MASTER BAG QTY |
|----------|------------------------|--------|-------|-----------------|---------|----------------|
| 20812    | 18                     | 4      | .098  | .87             | 100     | 1,000          |
| 20814    | 50                     | 8      | .181  | 2.05            | 100     | 1,000          |
| 20816    | 50                     | 11     | .189  | 3.03            | 100     | 1,000          |
| 20818    | 50                     | 14-1/2 | .189  | 4.13            | 100     | 1,000          |



# Air Handling Cable Ties For Plenum Areas

- Meets UL 2043 for use in air handling spaces
- Generates low smoke & offers low heat release
- Burgundy Color
- 50 Lb. Tensile strength
- UL 62275 Listed Type 21 AH-2 for use in Air Handling Spaces (Plenums)

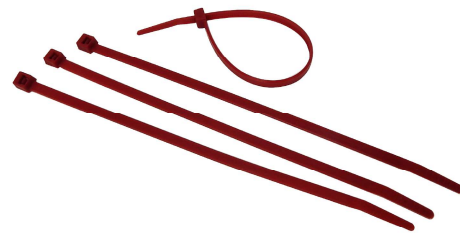

DIMENSIONS = INCHES

| CAT. NO. | TENSILE STRENGTH (LBS.) | LENGTH | WIDTH | MAX BUNDLE DIA. | BAG QTY | CASE QTY |
|----------|-------------------------|--------|-------|-----------------|---------|----------|
| 20982    | 50                      | 7.5"   | .19"  | 2.0"            | 100     | 5,000    |
| 20984    | 50                      | 11"    | .19"  | 3.0"            | 100     | 5,000    |
| 20986    | 50                      | 14.8"  | .19"  | 4.0"            | 100     | 5,000    |