


Classic Linear StripLight



- Classic LED 4' Strip Lighting Fixture
- 0-10V Dimmable
- Compatible with most LED Dimmers
- Linkable - Hardware Included
- Surface Mount Kit Included
- 2835 SMD LEDs
- Efficacy: 125 lm/w
- CRI: >80
- THD: <20%@120V
- PF: >.98
- R9: 8
- Beam Angle: H: 99° V: 149°
- Input Current: .36A @120V
- Input Voltage: 120-277 VAC
- Operating Temperature: -22°F to 104°F
- Powder Coat Painted Steel Housing
- High Quality PMMA Diffusor
- 50,000+ Hour LED Life Expectancy
- Knockouts Located on top
- IP20 Dry Location Rated
- 5 Year Warranty

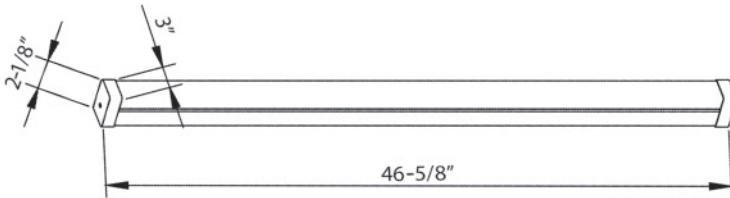

Cat. No.	Length	Color Temp	Watts	Delivered Lumens	CRI	Replaces Fluorescent	Order In Case Qty
71911	4'	5000K	40	5000	80	64-128W	10
71912	4'	4000K	40	5000	80	64-128W	10


STRIP LIGHTING

Classic Linear StripLight



Suspension or Surface Mountable

- Classic LED 4' Suspended Strip Fixture
- Can be Surface Mounted or Suspended
- Linkable - hardware included with fixture
- Surface Mount Kit Included
- 0-10V Dimmable
- Compatible with most LED Dimmers
- 2835 SMD LEDs
- Efficacy: 130 lm/w
- CRI: >80
- THD: <20%@120V
- PF: >.95
- R9: 8
- Beam Angle: H: 96° V: 72°
- Input Current: .36A @120V
- Input Voltage: 120-277 VAC
- Operating Temperature: -22°F to 104°F
- Powder Coat Aluminum Housing
- PMMA Diffusor
- 50,000+ Hour LED Life Expectancy
- Knockouts located on top
- IP 20 Dry Location Rated
- 5 Year Warranty

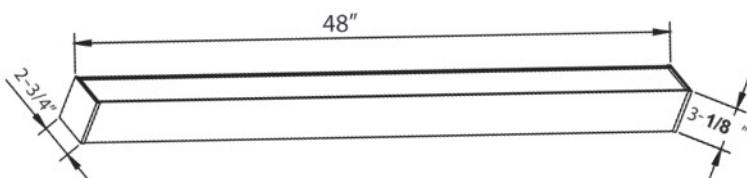

Cat. No.	Length	Color Temp	Watts	Delivered Lumens	CRI	Replaces Fluorescent	Order In Case Qty	
71922	4'	5000K	40	5000	80	64-128W	6	
71923	4'	4000K	40	5000	80	64-128W	6	
71929			Suspension Kit					1