

**MAXIMUM ELECTRIC CURRENT:**

Awg	22	20	18	16	14	12	10
Amp	3	4	7	10	15	20	24

**MAXIMUM ELECTRIC RATING:** 167°F(75°C) 300 Volts

**INSULATION MATERIAL:** Vinyl



**TERMINAL MATERIAL:** Electro-Tin Plated Brass

**FEATURES:** Serrated Barrel, Expanded Insulation

Dimensions = Inches

Cat. No.	Color	Wire Size AWG	NEMA TAB	W	F	L	B	C	D	T	Bag Qty	Master Bag Qty
10308	Red	22-16	.020 X.110	.126	.256	.732	.394	.067	.157	.012	100	1000
10310	Red	22-16	.032 X.110	.126	.256	.732	.394	.067	.157	.012	100	1000
10312	Red	22-16	.020 X.187	.197	.252	.748	.394	.067	.157	.014	100	1000
10311	Red	22-16	.032 X.187	.197	.252	.748	.394	.067	.157	.014	100	1000
10313	Red	22-16	.020 X.205	.224	.260	.728	.394	.067	.157	.014	100	1000
10314	Red	22-16	.032 X.250	.260	.287	.807	.394	.067	.157	.016	100	1000
10316	Blue	16-14	.020 X.110	.126	.256	.732	.394	.091	.177	.012	100	1000
10318	Blue	16-14	.032 X.110	.126	.256	.732	.394	.091	.177	.012	100	1000
10322	Blue	16-14	.020 X.187	.197	.252	.748	.394	.091	.177	.014	100	1000
10323	Blue	16-14	.032 X.187	.197	.252	.748	.394	.091	.177	.014	100	1000
10325	Blue	16-14	.020 X.205	.224	.260	.728	.394	.091	.177	.014	100	1000
10324	Blue	16-14	.032 X.250	.260	.287	.807	.394	.091	.177	.016	100	1000
10328	Yellow	12-10	.020 X.110	.126	.256	.866	.512	.134	.217	.014	100	1000
10329	Yellow	12-10	.032 X.110	.126	.256	.866	.512	.134	.217	.014	100	1000
10330	Yellow	12-10	.020 X.187	.197	.256	.866	.512	.134	.217	.014	100	1000
10331	Yellow	12-10	.032 X.187	.197	.256	.866	.512	.134	.217	.014	100	1000
10332	Yellow	12-10	.032 X.250	.260	.287	.925	.512	.134	.217	.016	100	1000

# Vinyl Insulated Male Disconnects

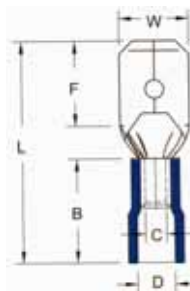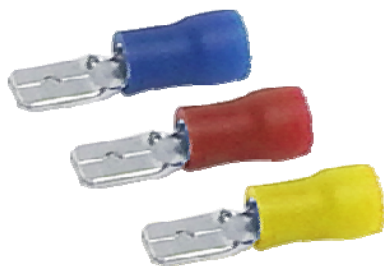

**MAXIMUM ELECTRIC CURRENT:**

Awg	22	20	18	16	14	12	10
Amp	3	4	7	10	15	20	24

**MAXIMUM ELECTRIC RATING:** 167°F(75°C) 300 Volts

**INSULATION MATERIAL:** Vinyl

**TERMINAL MATERIAL:** Electro-Tin Plated Brass

**FEATURES:** Serrated Barrel, Expanded Insulation

Dimensions = Inches

Cat. No.	Color	Wire Size AWG	NEMA TAB	W	F	L	B	C	D	T	Bag Qty	Master Bag Qty
10208	Red	22-16	.020 X.110	.110	.256	.728	.394	.067	.157	.020	100	1000
10210	Red	22-16	.032 X.110	.110	.256	.728	.394	.067	.157	.016	100	1000
10212	Red	22-16	.020 X.187	.189	.256	.748	.394	.067	.157	.020	100	1000
10213	Red	22-16	.032 X.187	.189	.264	.748	.394	.067	.157	.016	100	1000
10214	Red	22-16	.032 X.250	.250	.303	.827	.394	.067	.157	.016	100	1000
10222	Blue	16-14	.020 X.187	.189	.256	.748	.394	.091	.177	.020	100	1000
10223	Blue	16-14	.032 X.187	.189	.264	.748	.394	.091	.177	.016	100	1000
10224	Blue	16-14	.032 X.250	.250	.303	.827	.394	.091	.177	.016	100	1000
10232	Yellow	12-10	.032 X.250	.250	.303	.945	.512	.134	.217	.016	100	1000