



# 74095C - SPEC GRADE UFO HIGH BAY

150W 4000K 120-277V




## FEATURES:

- Black, die cast aluminum housing
- IP65 Wet Location Rated
- 0-10V Dimming
- 6KV Surge Protection
- 90 Degree Beam Angle
- Fin design on top to maintain proper heat dissipation
- cULus Listed
- 5 Year Warranty
- Applications: Warehouse, factory, workshop, gymnasium, gas station, supermarket, etc.
- Easy to Install & Operate, Pendant and Surface Mount

Part#	Wattage	Voltage	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt
74095C	150W	120-277	21,096	4000K	>80	0-10V	90°	141

## PHOTOMETRY:

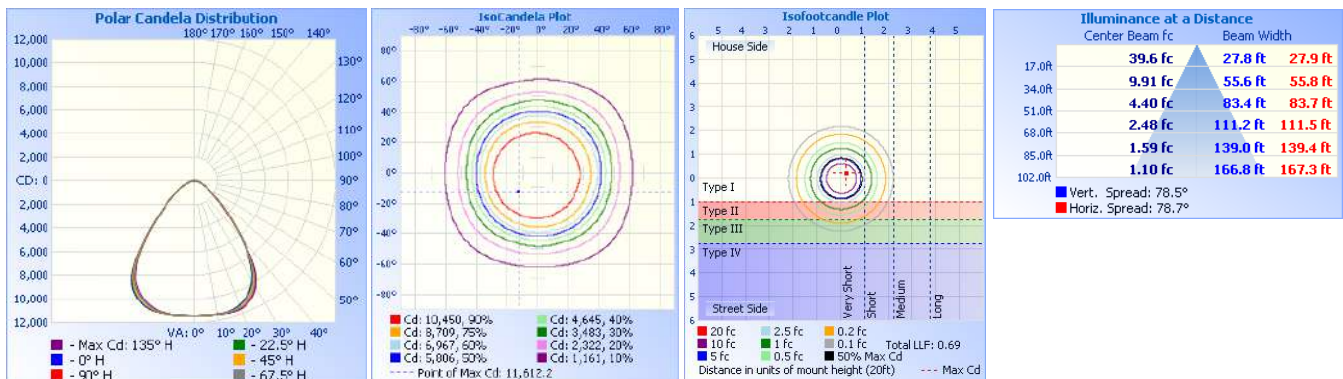



# 74095C - SPEC GRADE UFO HIGH BAY

150W 4000K 120-277V

## Technical Specifications:

### Electrical:

Input Voltage: 120 - 277

Current: 1.246A @ 120V

Frequency: 50/60Hz

Power Factor:  $\geq 0.9$

THD:  $< 20\%$

### Product Parameters:

150 Watts

Lumens: 21,096

Efficacy: 141 Lumens Per Watt

50,000+ L70 Life Span

CCT: 4000K

### Chromaticity Measurements:

Beam Angle:  $90^\circ$

CRI:  $> 80$

Flicker Percent:  $< 10\%$

R9: 13

DUV:  $+0.0005$

Chromaticity (x,y):  $x=0.3777$   $y=0.3740$

Chromaticity (u,v):  $u=0.2244$   $v=0.5000$

### Component Specifications:

LED: Seoul 2835

Driver: 120V 50/60Hz

Driver Output Volts: 150V/DC

Driver Output Amps: 1.0A

6KV Surge Protection

### Dimming:

0-10V / PMW

### Operating Temperature:

Minimum Starting  $-40^\circ\text{F}$  -  $122^\circ\text{F}$

### Construction:

Housing: Die Cast Aluminum Housing Powder Coated, Black Housing

IP Rating: IP65 Damp Location Rated

Lens Material: PC

Mounting: Surface Mount, Pendant Mount

Cord Length: 6 Feet

Listings: cULus, DLC Premium: S-W8D5KL

### Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

