



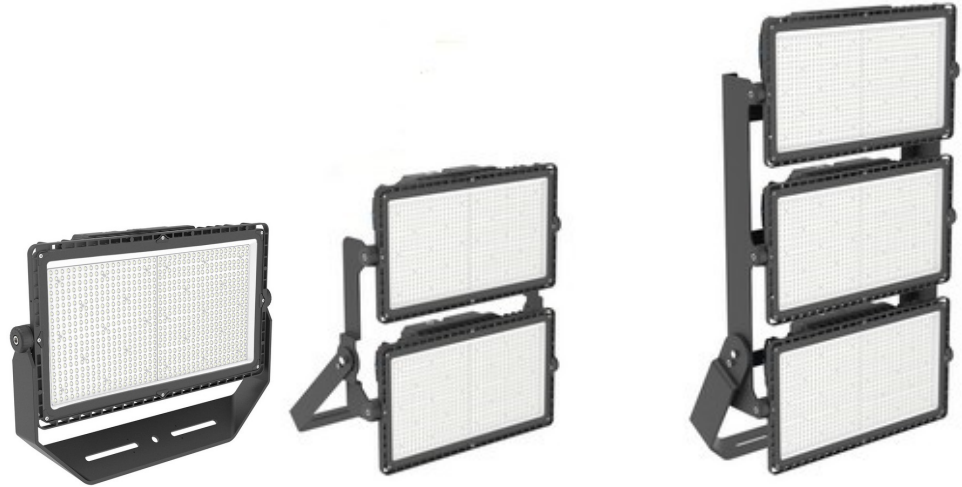

77106 - HOT SHOT SQUARED SPORTS LIGHT

120-277V 5000K 500W

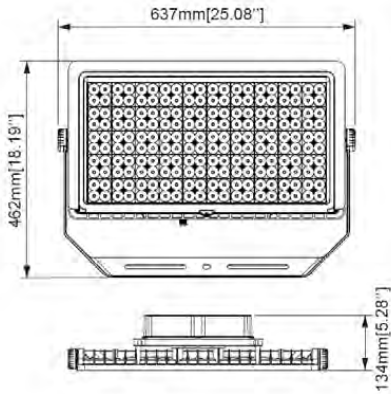

Optional configurations, bracket sold separately

FEATURES:

- Modular Sports Light
- Light Distribution: 30°
- Operation Temperature: -40°F - 113°F
- 50,000+ Hour LED Life Expectancy
- Housing Color: Black
- 5' Whip
- Direct Replacement for Metal Halide
- 10KV Surge Suppression
- IP65 Waterproof Rating
- Listings: cULus
- DLC PRODUCT ID#: S-AKXUB9
- 5 Year Warranty



Part#	Wattage	Voltage	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC PRODUCT ID#:
77106	500W	120-277V	67,244	5000K	>70	0-10V	30°	134 lm/w	S-AKXUB9



77106 - HOT SHOT SQUARED SPORTS LIGHT

120-277V 5000K 500W


PHOTOMETRY

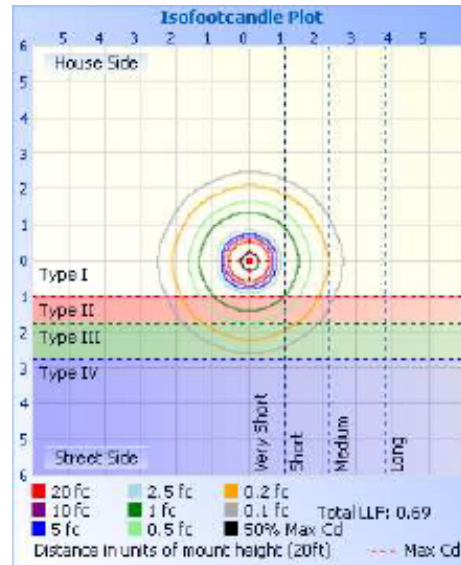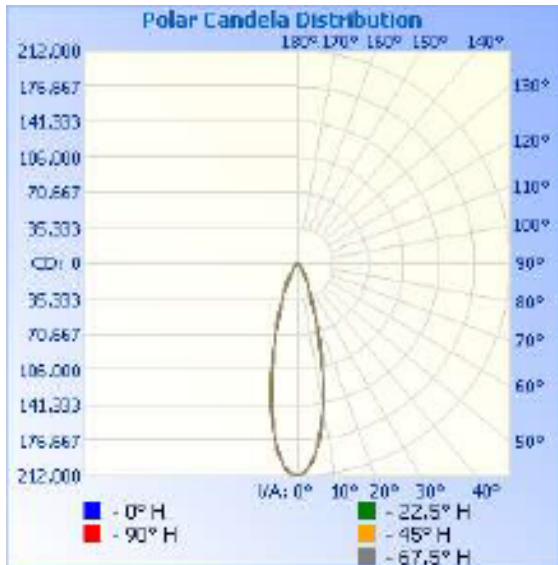

Illuminance at a Distance

	Center Beam fc	Beam Width
4.0ft	13,193.5 fc	1.9 ft 1.9 ft
6.0ft	3,298.4 fc	3.9 ft 3.8 ft
12.0ft	1,465.9 fc	5.8 ft 5.8 ft
16.0ft	824.6 fc	7.7 ft 7.7 ft
20.0ft	527.7 fc	9.6 ft 9.6 ft

■ Vert. Spread: 27.1°
■ Horiz. Spread: 27.1°

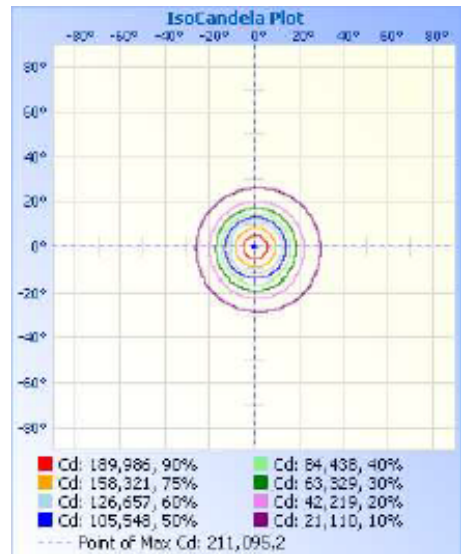



77106 - HOT SHOT SQUARED SPORTS LIGHT

120-277V 5000K 500W

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: 4.1A @ 277V

Frequency: 60Hz

Power Factor: ≥ 0.99

THD: <15%

Product Parameters:

500 Watts

Lumens: 67,244

Efficacy: 134 Lumens Per Watt

50,000+ Hour LED Life Span

CCT: 5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 30°

BUG Rating: B5-U4-G2

Component Specifications:

LED: SMD3030

Driver: 120-277V 50-60HZ

10,000KV Surge Protection

Dimming: 0-10V

Operating Temperature:

Minimum Starting -40°F - 113°F

Construction:

Housing: Aluminum, Powder Coated

5' Whip Length

IP Rating: IP65

Lens Material: Polycarbonate

Mounting: Yoke (Bracket) OR Slipfitter

EPA: 3.73ft²

Listings: cULus

DLC PREMIUM PRODUCT ID#: S-AKXUB9

Carton Qty: 1

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).