




# Copper Ground Clamps - Cable Adaptor

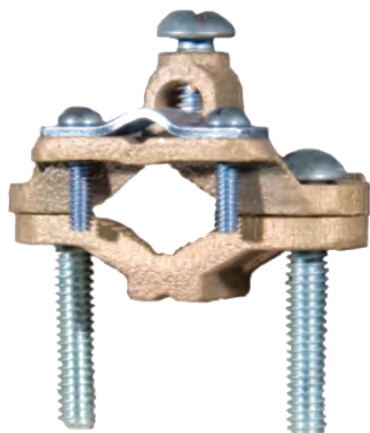

- For Connecting Ground Wire to Water Pipe, Copper Tubing & Ground Rod
- Standard Collar and Pressure Bar Grip Adaptor decreases chances of grounding conductors being pulled out
- Cast of High Strength High Conductivity Copper Alloy
- Steel Set Screws are Zinc Plated for Corrosion Resistance

DIMENSIONS = INCHES

CAT. NO.	PIPE RANGE	WIRE RANGE		BOX QTY
		MIN	MAX	
91670	1/2" - 1"	8 SOL	4 STR	10
91672	1-1/4" - 2"	8 SOL	4 STR	10

# Copper Ground Clamps - Cable Adaptor - Top Mount




- For Connecting Ground Wire to Water Pipe, Copper Tubing & Ground Rod
- Standard Collar and Pressure Bar Grip Adaptor decreases chances of grounding conductors being pulled out
- Pressure Bar Swings 360° for Easy Alignment
- Cast of High Strength High Conductivity Copper Alloy
- Steel Set Screws are Zinc Plated for Corrosion Resistance

DIMENSIONS = INCHES

CAT. NO.	PIPE RANGE	WIRE RANGE		BOX QTY
		MIN	MAX	
91680	1/2" - 1"	10 SOL	6 SOL	10
91682	1-1/4" - 2"	10 SOL	6 SOL	10

# Copper Ground Clamps - Serrated Collar - Cable Adaptor

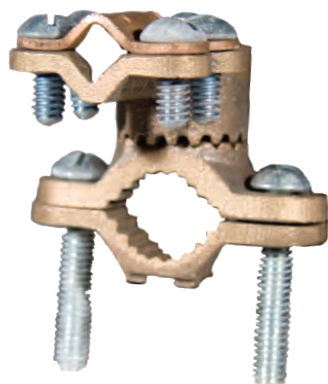

- For Connecting Armored Cable/Ground Wire to Water Pipe, Copper Tubing, & Ground Rod
- Serrated Collar and Adaptor Swings 360° for Easy Alignment
- Cast of High Strength High Conductivity Copper Alloy
- Steel Set Screws are Zinc Plated for Corrosion Resistance

DIMENSIONS = INCHES

CAT. NO.	PIPE RANGE	WIRE RANGE		DIMENSIONS			SCREW SIZE		BOX QTY
		MIN	MAX	LENGTH	DEPTH	HEIGHT	TOP	SIDE	
91690	1/2" - 1"	8 STR	4/0 STR	2.32	.75	1.44	1/4-20 X .63"	1/4-20 X 1.5"	10
91692	1-1/4" - 2"	8 STR	4/0 STR	3.54	.83	2.13	1/4-20 X .63"	5/16-18 X 2"	10
91694	2-1/2" - 4"	8 STR	4/0 STR	5.95	.98	2.95	1/4-20 X .63"	5/16-18 X 4"	25
91696	4-1/2" - 6"	8 STR	4/0 STR	8.09	.94	4.19	1/4-20 X .63"	5/16-18 X 5"	25