



Catalog Number	11056
UPC Number	60198611056
Description	Non-Insulated Ring Terminals 12-10 AWG



Features


- Non-Insulated
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Brazed seam prevents splitting under maximum pressure
- Wire range stamped on the surface for easy interpretation

General

Insulation Type	None
Material	Copper
Finish	Electro-tin plated
Color	N/A
Wire Range	12-10
Stud Size	#6

Dimension Information

L Inches (mm)	0.618
W Inches (mm)	0.283
D Inches (mm)	0.22
d1 Inches (mm)	0.134
d2 Inches (mm)	0.146
E Inches (mm)	0.236
F Inches (mm)	0.283
T Inches (mm)	0.039

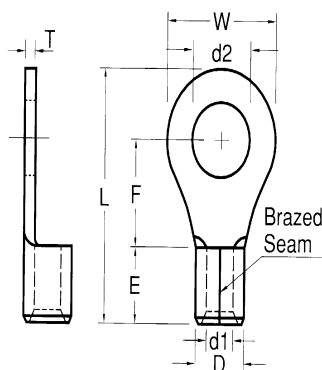

Specifications

Temperature Rating	150°C	
Voltage Rating	600 V	
Flammability Rating	N/A	
Amp Rating	12 AWG	35 Amps
	10 AWG	50 Amps

Packaging

Bag Qty	100
Master Bag Qty	1000

Certifications


UL	Yes
cUL	Yes
RoHS	Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com



REV	DESCRIPTION	DATE
△ RDK-96036		2007/10/18
△ RDK-97127		2008/10/15
△ RDK-98020		2009/09/22

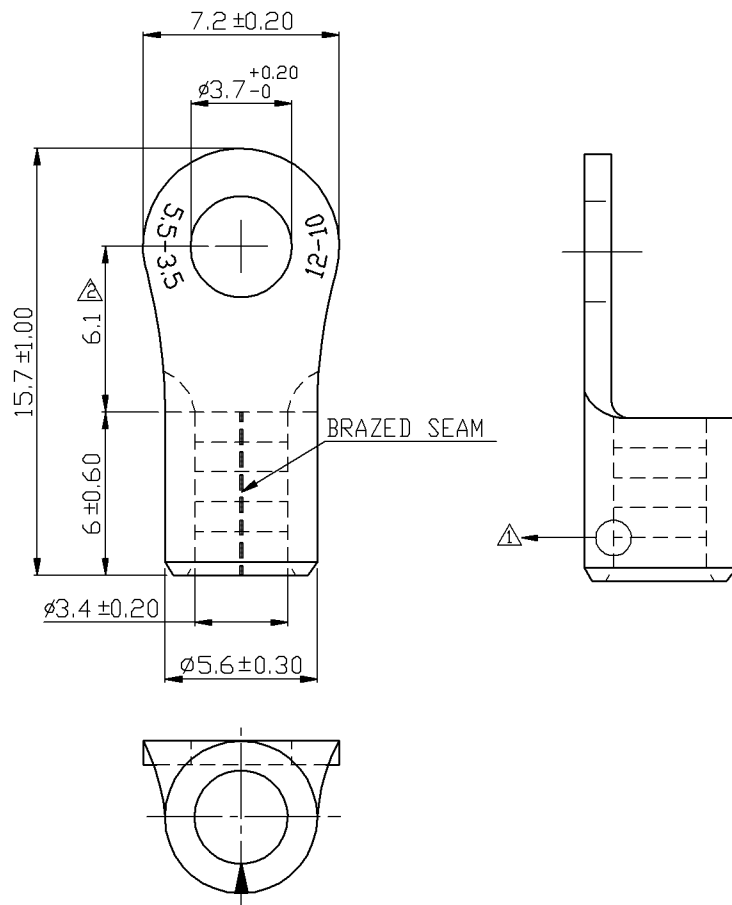

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	12	10	
AMP.	35	50	
2. WIRE RANGE : 12-10 A.W.G. (4 - 6 mm²)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 1.00 mm

Tolerance Unless Otherwise Specified			
0 >	mm ±	ANGLE	
>	mm ±	0° >	° REF ±
>	mm ±	°	° ±
>	mm ±	°	° ±

NAME	NON-INSULATED RING TERMINALS			UNIT	mm	
PART NO.	11056			MATERIAL	COPPER	APPROVE
NUMBER	k	SCALE	SHEET	PAGE	CHECKED	
DATE	2006/09/25	4/1	1-3	10F2	DRAWN	

Morris Products Inc.