



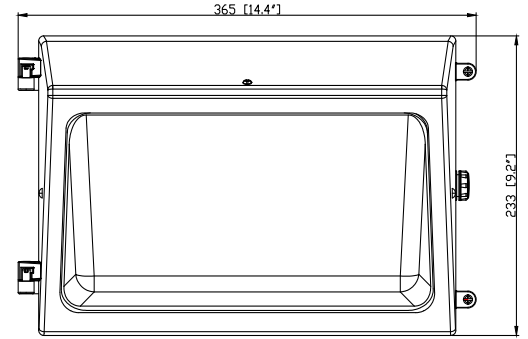

71475D - BRONZE MEDIUM WALL PACK CCT & WATTAGE SELECTABLE

120-277V, 36W/45W/60W
3K/4K/5K

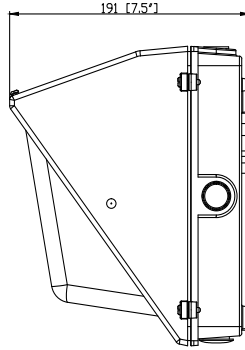

Built-In Photocell Included!

FEATURES:

- Die Cast Aluminum Housing/ Stainless Hardware
- Polyester White Powder Coating
- Aluminum Heat Sink & Customized Fin Design for Optimal Heat Dissipation
- Heat Resistant Optics
- Borosilicate Glass Lens
- 0-10V Dimmable
- Photocontrol included with on/off switch
- Operation Temperature: -40°F - 104°F
- Emergency Battery Backup (Sold Separately)
- Light Pattern: 117°
- Certifications: ETL/cETL,
- DLC PRODUCT ID#: S-AZL8UK
- Wet Location Rated
- 5 Year Warranty

Part#	CCT	Lumens	Voltage	Wattage	Light Pattern	Dimming	Lumens/Watt
71475D	3000K	8035@60W	120-277V	36/45/60W	117°	0-10V	135 lm/w
	4000K	8455@60W					141 lm/w
	5000K	8235@60W					137 lm/w



71475D - BRONZE MEDIUM WALL PACK

TECHNICAL SPECIFICATIONS:

Electrical:

Input Voltage: 120V-277V
 Current: see chart pg 1
 Frequency: 50/60Hz
 Power Factor: ≥ 0.90
 THD: $< 20\%$ @120V

Product Parameters:

Efficacy: 135-141 lumens per watt
 50,000+ Hour L70 Life Span
 CCT: 3000K, 4000K, 5000K

Chromacity Measurements:

Beam Angle: 117°
 BUG Rating: B1-U4-G5
 CRI: 73-75
 R9: -23/-25/-30

Component Specifications:

LED
 120V-277V

Dimming: 0-10V

Operating Temperature: -40°F - 104°F

Construction:

Housing: Die Cast Aluminum Alloy Powder Coated Finish
 Lens Material: Prismatic Borosilicate Glass Lens
 Lens: UV Resistant, Fire Resistant

Ingress Protection: WET location Rated

Mounting: Wall Mount

Listings:

cETLus
 DLC PRODUCT ID#: S-AZL8UK

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

PHOTOMETRY:

