



# 71527C - DESIGNER MINI WALL PACK

13/18/26W 3K/4K/5K BRONZE







## FEATURES:

- Wattage Selectable: 13/18/26W
- Color Selectable: 3000K/4000K/5000K
- Integrated Photocell with on/off switch
- Perfect for driveways, parking areas, front/back door lighting
- 5 Year Warranty
- 0-10V Dimming
- Die Cast Aluminum Housing, Bronze Finish
- Frosted Polycarbonate Lens
- DLC & cETLus Listed

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	CRI	Lumens/Watt	Dimming
71527C	Bronze	13/18/26W	3,546	3K/4K/5K	120-277V	81	137	0-10V

## PHOTOMETRY:

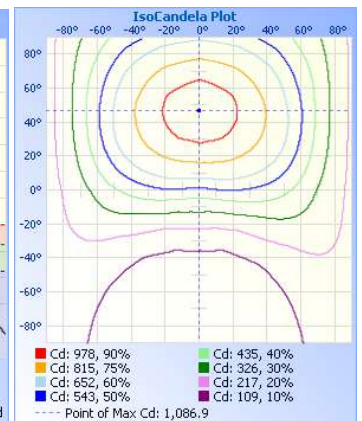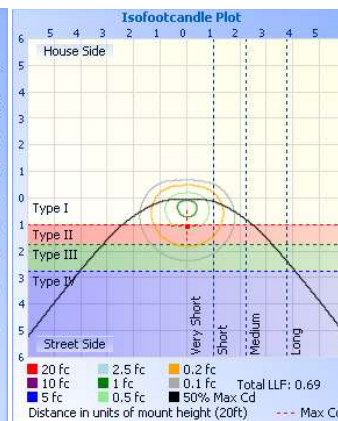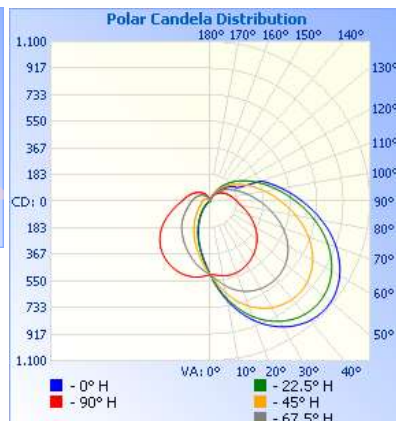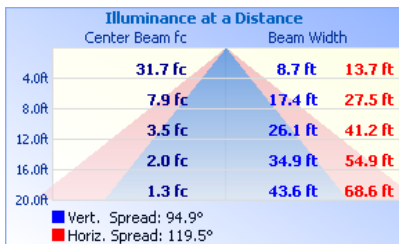



# 71527C - DESIGNER MINI WALL PACK

13/18/26W 3K/4K/5K BRONZE

## Technical Specifications:

### Electrical:

Input Voltage: 120-277V

Current: 0.23 @ 120V

Frequency: 60Hz

Power Factor:  $\leq 0.96$

THD:  $\geq 20\%$

### Product Parameters:

13/18/26 Watts

Efficacy: 137 lumens per watt

Max Lumens @ 277V: 4,037

50,000+ LED Life Span

CCT: 3000K/4000K/5000K

### Chromaticity Measurements:

Beam Angle: 124°

BUG Rating: B2-U5-G5

CRI: 81

R9:  $\geq 3$

DUV:  $< 0.0014$

Chromaticity (x,y): x= 0.3421 y= 3521

Chromaticity (u,v): u= 0.2092 v= 0.4844

### Component Specifications:

Driver: 120V 50-60HZ

2500V Surge Protection

Dimming: 0-10V

### Operating Temperature:

Minimum Starting -40° - 122° F

Operating Humidity: 20~95% RH, Non-condensing

### Construction:

Housing: Corrosion Resistant Die-Cast Aluminum, Bronze

Finish IP Rating: IP65 Wet Location Rated

Lens Material: Frosted Polycarbonate

Mounting: Wall Mount

Listings: cETLus, DLC Product ID: S-LW32ZN

Carton Qty: 10

Weight: 2.2 lbs.

### Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

### LUMEN BREAKDOWN (@120V):

	3000K	4000K	5000K
13W	1,990	2,049	2,079
18W	2,605	2,739	2,737
26W	3,546	3,792	3,939

### PRODUCT DIMENSIONS:

