




MORRIS CAT#: 72651

6" New Construction Square Downlight Smooth Trim 120V, 15W, 4000K

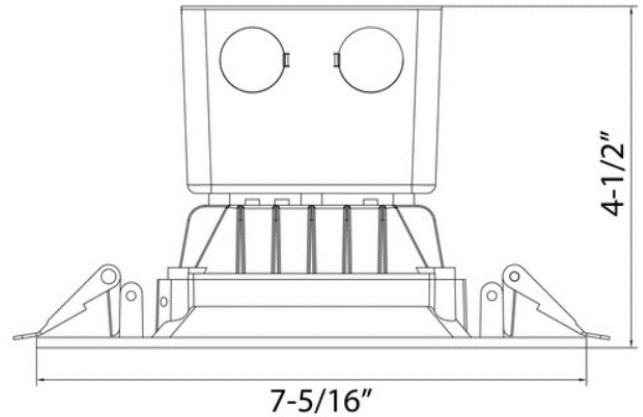


Features:

- Recessed Square New Construction Downlight
- Aluminum Housing/Trim - Paintable
- Includes 4" Square Junction Box
- Torsion Spring Brackets for Mounting to Sheetrock
- Triac Dimming Technology
- Operating Temperature: -4°F to 104°F
- IC (Insulation Contact) Rated
- Certification: cETLus, ES
- IP44 Rated for Wet Locations
- 5 Year Limited Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Input Current @ 120V	Lumens/ Watt	Energy Star
72651	White	15W	937	4000K	120	0.125A	62	Yes

Photometry:

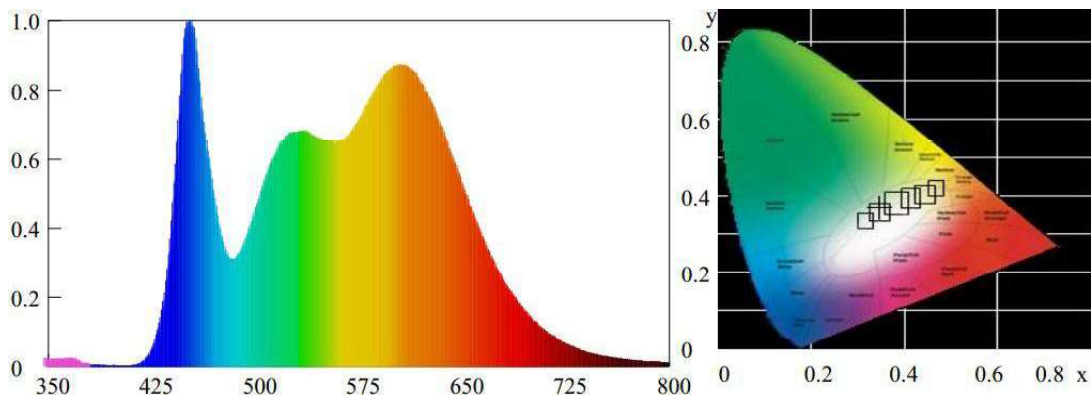



MORRIS CAT#: 72651

6" New Construction Square Downlight Smooth Trim 120V, 15W, 4000K

Technical Specifications:

Electrical:

Input Voltage: 120V
Current: 0.125A @ 120V
Frequency: 50-60Hz
Power Factor: ≥ 0.99

Product Parameters:

Wattage: 15W
Lumens: 937
Efficacy: 62 lm/ watt
50,000+ Hour LED Life Span
CCT: 4000K (Neutral White)

Chromaticity Measurements:

Beam Angle: 97°
BUG Rating: N/A
CRI: 90
R9: 58
DUV: -0.0025
Chromaticity (x,y): x=.3761; y= .3688
Chromaticity (u,v): u=.2255; v= .3316

Component Specifications:

LED: SMD2835
Driver: 120-277V
50-60HZ
Driver Output Volts: 80-90V DC
Driver Output Amps: 130mA
Surge Protection: 1.5 KV

Dimming: Triac

Operating Temperature:

Minimum Starting -4°F to 104°F

Construction:

Housing: Aluminum Housing/Trim - White Finish

IP Rating: IP44 Indoor Wet Location Rated Lens

Material: Frosted Polycarbonate Lens

Mounting: Ceiling Mount (Drywall/Sheetrock)

Listings: cETLus, ES, IC Rated

Carton Qty: 12

Weight: 1.8 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).